

GDZJ2.0-35~GDZJ56-35

AXIAL LEAD ZENER DIODES

VOLTAGE 2 to 56 Volt **POWER** 500 mWatt

DO-35

Unit : inch(mm)

FEATURES

- Planar Die construction
- 500mW Power Dissipation
- Ideally Suited for Automated Assembly Processes
- Lead free in compliance with EU RoHS 2011/65/EU directives


MECHANICAL DATA

- Case: Molded glass DO-35
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.13 grams
- Ordering information: Suffix : " -35" to order DO-35 Package
- Packing information

B/P - 2K per Bulk box

T/R - 10K per 15" plastic Reel

T/B - 5K per horiz. tape & Ammo box

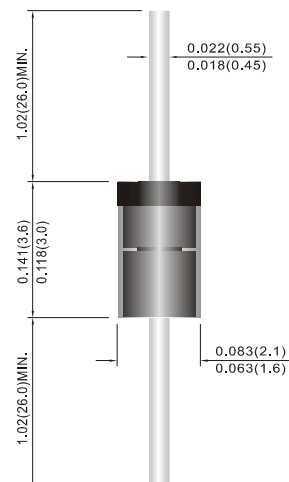

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Power Dissipation on $T_A=25^{\circ}\text{C}$	P_{TOT}	500	mW
Operating Junction Temperature Range	T_J	175	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 to + 175	$^{\circ}\text{C}$
Valid provided that leads at a distance of 10mm from case are kept at ambient perature.			

Parameter	Symbol	Min.	Typ.	Max.	Units
Thermal Resistance	$R_{\theta JA}$	-	-	0.3	$^{\circ}\text{C}/\text{mW}$
Forward Voltage at $I_F=100\text{mA}$	V_F	-	-	1	V
Valid provided that leads at a distance of 10mm from case are kept at ambient perature.					

GDZJ2.0-35~GDZJ56-35



Part Number	Nominal Zener Voltage			Max. Zener Impedance				Max Reverse Leakage Current		Marking Code
	V _Z @ I _{ZT}			Z _{ZT} @ I _{ZT}		Z _{ZK} @ I _{ZK}		I _R @ V _R		
	Nom. V	Min. V	Max. V	Ω	mA	Ω	mA	μA	V	
500 mW Zener Diodes										
GDZJ 2.0A-35	2	1.88	2.1	100	5	1000	0.5	120	0.5	Z2A0
GDZJ 2.0B-35	2	2.02	2.2	100	5	1000	0.5	120	0.5	Z2B0
GDZJ 2.2A-35	2.2	2.12	2.3	100	5	1000	0.5	120	0.7	Z2A2
GDZJ 2.2B-35	2.2	2.22	2.41	100	5	1000	0.5	120	0.7	Z2B2
GDZJ 2.4A-35	2.4	2.33	2.52	100	5	1000	0.5	120	1	Z2A4
GDZJ 2.4B-35	2.4	2.43	2.63	100	5	1000	0.5	120	1	Z2B4
GDZJ 2.7A-35	2.7	2.54	2.75	110	5	1000	0.5	120	1	Z2A7
GDZJ 2.7B-35	2.7	2.69	2.91	110	5	1000	0.5	120	1	Z2B7
GDZJ 3.0A-35	3.0	2.85	3.07	120	5	1000	0.5	50	1	Z3A0
GDZJ 3.0B-35	3.0	3.01	3.22	120	5	1000	0.5	50	1	Z3B0
GDZJ 3.3A-35	3.3	3.16	3.38	120	5	1000	0.5	20	1	Z3A3
GDZJ 3.3B-35	3.3	3.32	3.53	120	5	1000	0.5	20	1	Z3B3
GDZJ 3.6A-35	3.6	3.46	3.69	100	5	1000	1	10	1	Z3A6
GDZJ 3.6B-35	3.6	3.6	3.84	100	5	1000	1	10	1	Z3B6
GDZJ 3.9A-35	3.9	3.74	4.01	100	5	1000	1	5	1	Z3A9
GDZJ 3.9B-35	3.9	3.89	4.16	100	5	1000	1	5	1	Z3B9
GDZJ 4.3A-35	4.3	4.04	4.29	100	5	1000	1	5	1	Z4A3
GDZJ 4.3B-35	4.3	4.17	4.43	100	5	1000	1	5	1	Z4B3
GDZJ 4.3C-35	4.3	4.3	4.57	100	5	1000	1	5	1	Z4C3
GDZJ 4.7A-35	4.7	4.44	4.68	90	5	900	1	5	1	Z4A7
GDZJ 4.7B-35	4.7	4.55	4.8	90	5	900	1	5	1	Z4B7
GDZJ 4.7C-35	4.7	4.68	4.93	90	5	900	1	5	1	Z4C7
GDZJ 5.1A-35	5.1	4.81	5.07	80	5	800	1	5	1.5	Z5A1
GDZJ 5.1B-35	5.1	4.94	5.2	80	5	800	1	5	1.5	Z5B1
GDZJ 5.1C-35	5.1	5.09	5.37	80	5	800	1	5	1.5	Z5C1
GDZJ 5.6A-35	5.6	5.28	5.55	60	5	500	1	5	2.5	Z5A6
GDZJ 5.6B-35	5.6	5.45	5.73	60	5	500	1	5	2.5	Z5B6
GDZJ 5.6C-35	5.6	5.61	5.91	60	5	500	1	5	2.5	Z5C6
GDZJ 6.2A-35	6.2	5.78	6.09	60	5	300	1	5	3	Z6A2
GDZJ 6.2B-35	6.2	5.96	6.27	60	5	300	1	5	3	Z6B2
GDZJ 6.2C-35	6.2	6.12	6.44	60	5	300	1	5	3	Z6C2
GDZJ 6.8A-35	6.8	6.29	6.63	20	5	150	0.5	2	3.5	Z6A8
GDZJ 6.8B-35	6.8	6.49	6.83	20	5	150	0.5	2	3.5	Z6B8
GDZJ 6.8C-35	6.8	6.66	7.01	20	5	150	0.5	2	3.5	Z6C8
GDZJ 7.5A-35	7.5	6.85	7.22	20	5	120	0.5	0.5	4	Z7A5
GDZJ 7.5B-35	7.5	7.07	7.45	20	5	120	0.5	0.5	4	Z7B5
GDZJ 7.5C-35	7.5	7.29	7.67	20	5	120	0.5	0.5	4	Z7C5
GDZJ 8.2A-35	8.2	7.53	7.92	20	5	120	0.5	0.5	5	Z8A2
GDZJ 8.2B-35	8.2	7.78	8.19	20	5	120	0.5	0.5	5	Z8B2
GDZJ 8.2C-35	8.2	8.03	8.45	20	5	120	0.5	0.5	5	Z8C2
GDZJ 9.1A-35	9.1	8.29	8.73	25	5	120	0.5	0.5	6	Z9A1
GDZJ 9.1B-35	9.1	8.57	9.01	25	5	120	0.5	0.5	6	Z9B1
GDZJ 9.1C-35	9.1	8.83	9.3	25	5	120	0.5	0.5	6	Z9C1
GDZJ 10A-35	10	9.12	9.59	30	5	120	0.5	0.2	7	Z10A
GDZJ 10B-35	10	9.41	9.9	30	5	120	0.5	0.2	7	Z10B
GDZJ 10C-35	10	9.7	10.2	30	5	120	0.5	0.2	7	Z10C
GDZJ 10D-35	10	9.94	10.44	30	5	120	0.5	0.2	7	Z10D
GDZJ 11A-35	11	10.18	10.71	30	5	120	0.5	0.2	8	Z11A
GDZJ 11B-35	11	10.5	11.05	30	5	120	0.5	0.2	8	Z11B
GDZJ 11C-35	11	10.82	11.38	30	5	120	0.5	0.2	8	Z11C

GDZJ2.0-35~GDZJ56-35

Part Number	Nominal Zener Voltage			Max. Zener Impedance				Max Reverse Leakage Current		Marking Code
	V _z @ I _{zT}			Z _{zT} @ I _{zT}		Z _{zK} @ I _{zK}		I _R @ V _R		
	Nom. V	Min. V	Max. V	Ω	mA	Ω	mA	μA	V	
500 mW Zener Diodes										
GDZJ 12A-35	12	11.13	11.71	30	5	110	0.5	0.2	9	Z12A
GDZJ 12B-35	12	11.44	12.03	30	5	110	0.5	0.2	9	Z12B
GDZJ 12C-35	12	11.74	12.35	30	5	110	0.5	0.2	9	Z12C
GDZJ 13A-35	13	12.11	12.75	35	5	110	0.5	0.2	10	Z13A
GDZJ 13B-35	13	12.55	13.21	35	5	110	0.5	0.2	10	Z13B
GDZJ 13C-35	13	12.99	13.66	35	5	110	0.5	0.2	10	Z13C
GDZJ 15A-35	15	13.44	14.13	40	5	110	0.5	0.2	11	Z15A
GDZJ 15B-35	15	13.89	14.62	40	5	110	0.5	0.2	11	Z15B
GDZJ 15C-35	15	14.35	15.09	40	5	110	0.5	0.2	11	Z15C
GDZJ 16A-35	16	14.8	15.57	40	5	150	0.5	0.2	12	Z16A
GDZJ 16B-35	16	15.25	16.04	40	5	150	0.5	0.2	12	Z16B
GDZJ 16C-35	16	15.69	16.51	40	5	150	0.5	0.2	12	Z16C
GDZJ 18A-35	18	16.22	17.06	45	5	150	0.5	0.2	13	Z18A
GDZJ 18B-35	18	16.82	17.7	45	5	150	0.5	0.2	13	Z18B
GDZJ 18C-35	18	17.42	18.33	45	5	150	0.5	0.2	13	Z18C
GDZJ 20A-35	20	18.02	18.96	55	5	200	0.5	0.2	15	Z20A
GDZJ 20B-35	20	18.63	19.59	55	5	200	0.5	0.2	15	Z20B
GDZJ 20C-35	20	19.23	20.22	55	5	200	0.5	0.2	15	Z20C
GDZJ 20D-35	20	19.72	20.72	55	5	200	0.5	0.2	15	Z20D
GDZJ 22A-35	22	20.15	21.2	30	5	200	0.5	0.2	17	Z22A
GDZJ 22B-35	22	20.64	21.71	30	5	200	0.5	0.2	17	Z22B
GDZJ 22C-35	22	21.08	22.17	30	5	200	0.5	0.2	17	Z22C
GDZJ 22D-35	22	21.52	22.63	30	5	200	0.5	0.2	17	Z22D
GDZJ 24A-35	24	22.05	23.18	35	5	200	0.5	0.2	19	Z24A
GDZJ 24B-35	24	22.61	23.77	35	5	200	0.5	0.2	19	Z24B
GDZJ 24C-35	24	23.12	24.31	35	5	200	0.5	0.2	19	Z24C
GDZJ 24D-35	24	23.63	24.85	35	5	200	0.5	0.2	19	Z24D
GDZJ 27A-35	27	24.26	25.52	45	5	250	0.5	0.2	21	Z27A
GDZJ 27B-35	27	24.97	26.26	45	5	250	0.5	0.2	21	Z27B
GDZJ 27C-35	27	25.63	26.95	45	5	250	0.5	0.2	21	Z27C
GDZJ 27D-35	27	26.29	27.64	45	5	250	0.5	0.2	21	Z27D
GDZJ 30A-35	30	26.99	28.39	55	5	250	0.5	0.2	23	Z30A
GDZJ 30B-35	30	27.7	29.13	55	5	250	0.5	0.2	23	Z30B
GDZJ 30C-35	30	28.36	29.82	55	5	250	0.5	0.2	23	Z30C
GDZJ 30D-35	30	29.02	30.51	55	5	250	0.5	0.2	23	Z30D
GDZJ 33A-35	33	29.68	31.22	65	5	250	0.5	0.2	25	Z33A
GDZJ 33B-35	33	30.32	31.88	65	5	250	0.5	0.2	25	Z33B
GDZJ 33C-35	33	30.90	32.5	65	5	250	0.5	0.2	25	Z33C
GDZJ 33D-35	33	31.49	33.11	65	5	250	0.5	0.2	25	Z33D
GDZJ 36A-35	36	32.14	33.79	75	5	250	0.5	0.2	27	Z36A
GDZJ 36B-35	36	32.79	34.49	75	5	250	0.5	0.2	27	Z36B
GDZJ 36C-35	36	33.4	35.13	75	5	250	0.5	0.2	27	Z36C
GDZJ 36D-35	36	34.01	35.77	75	5	250	0.5	0.2	27	Z36D
GDZJ 39A-35	39	34.68	36.47	85	5	250	0.5	0.2	30	Z39A
GDZJ 39B-35	39	35.36	37.19	85	5	250	0.5	0.2	30	Z39B
GDZJ 39C-35	39	36	37.85	85	5	250	0.5	0.2	30	Z39C
GDZJ 39D-35	39	36.63	38.52	85	5	250	0.5	0.2	30	Z39D
GDZJ 43-35	43	40	45	90	5	-	-	0.2	33	Z43
GDZJ 47-35	47	44	49	90	5	-	-	0.2	36	Z47
GDZJ 51-35	51	48	54	110	5	-	-	0.2	39	Z51
GDZJ 56-35	56	53	60	110	5	-	-	0.2	43	Z56

GDZJ2.0-35~GDZJ56-35

RATING AND CHARACTERISTIC CURVES

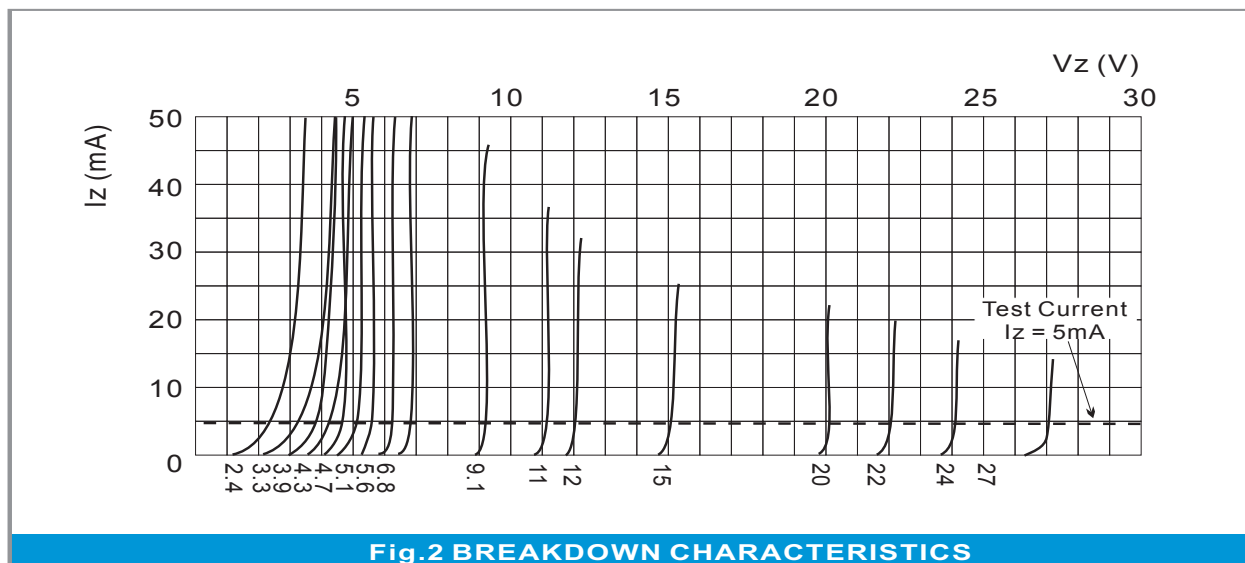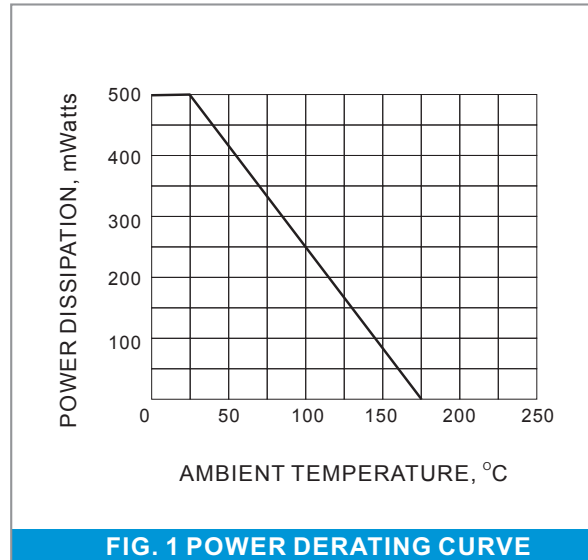

GDZJ2.0-35~GDZJ56-35

Part No_packing code_Version

GDZJ2.0A-35_AX_10001

GDZJ2.0A-35_AY_10001

GDZJ2.0A-35_B0_10001

GDZJ2.0A-35_R2_10001

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Siyang Grande Electronics Co., Ltd..
- Siyang Grande Electronics Co., Ltd. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Siyang Grande Electronics Co., Ltd. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Siyang Grande Electronics Co., Ltd. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Siyang Grande Electronics Co., Ltd. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Siyang Grande Electronics Co., Ltd. for any damages resulting from such improper use or sale.
- Since Grande uses lot number as the tracking base, please provide the lot number for tracking when complaining.