

PG600R~PG6010R

GLASS PASSIVATED JUNCTION FAST RECOVERY RECTIFIER



VOLTAGE	50 to 1000 Volt	CURRENT	6 Ampere
----------------	------------------------	----------------	-----------------

FEATURES

- High current capability
- Low leakage
- Fast switching for high efficiency.
- Lead free in compliance with EU RoHS2.0 (2011/65/EU & 2015/865/EU directive)

MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

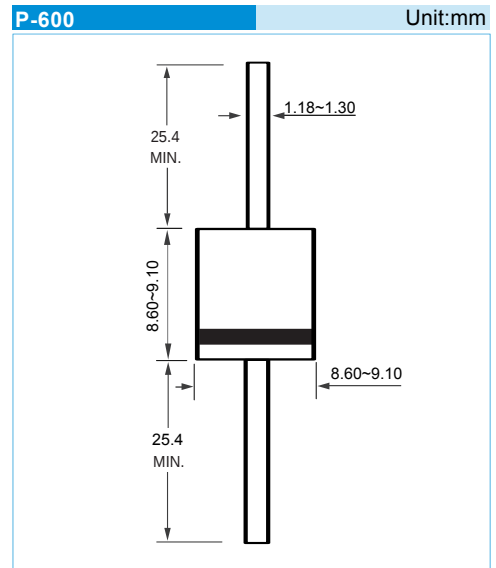


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	PG600R	PG601R	PG602R	PG604R	PG606R	PG608R	PG6010R	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current (see FIG.2)	I _{F(AV)}	6							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	250							A
Maximum Forward Voltage at 6 A	V _F	1.3							V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _J =25°C T _J =100°C	I _R	1.0 50							μA
Typical Junction Capacitance	C _J	150							pF
Maximum Reverse Recovery Time	t _{rr}	150				250	500		ns
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150							°C


PG600R~PG6010R

Figure 1
Typical Forward Characteristics

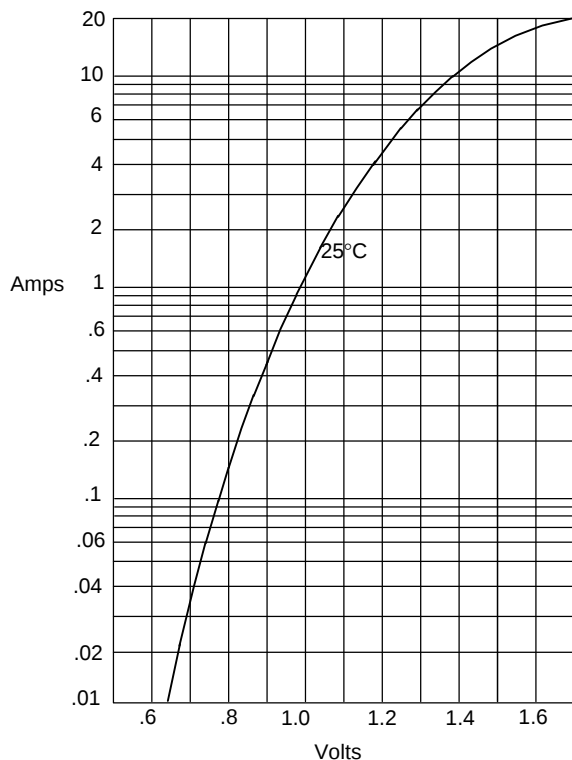

Instantaneous Forward Current - Amperes *versus*
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

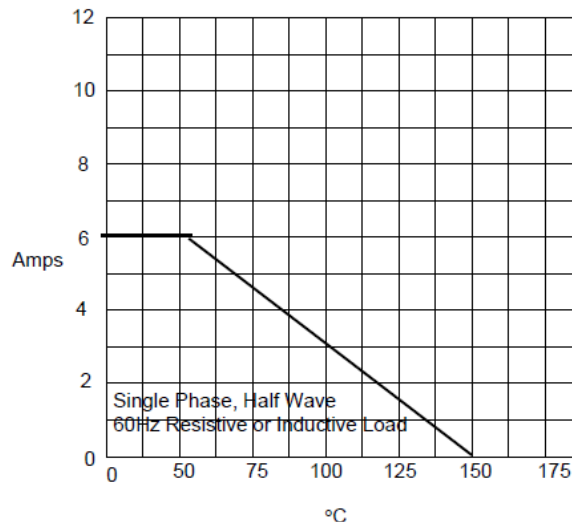

Average Forward Rectified Current - Amperes *versus*
Ambient Temperature - °C

Figure 4 MAXIMUM NON-REPETITIVE FORWARD
SURGE CURRENT


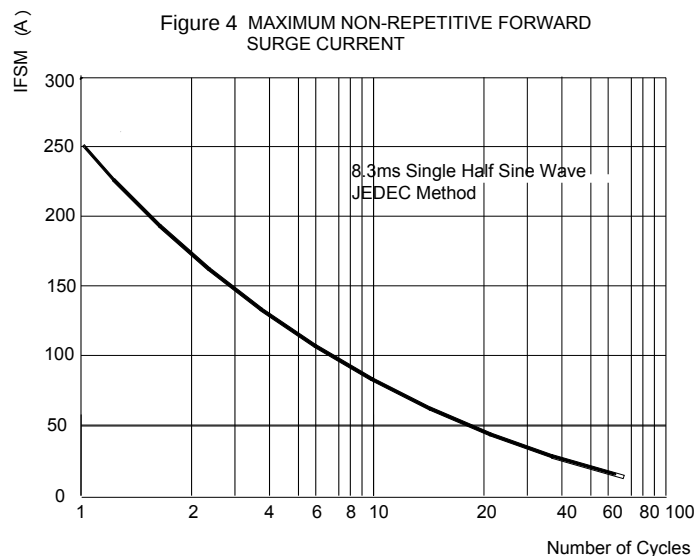


Figure 3
Junction Capacitance

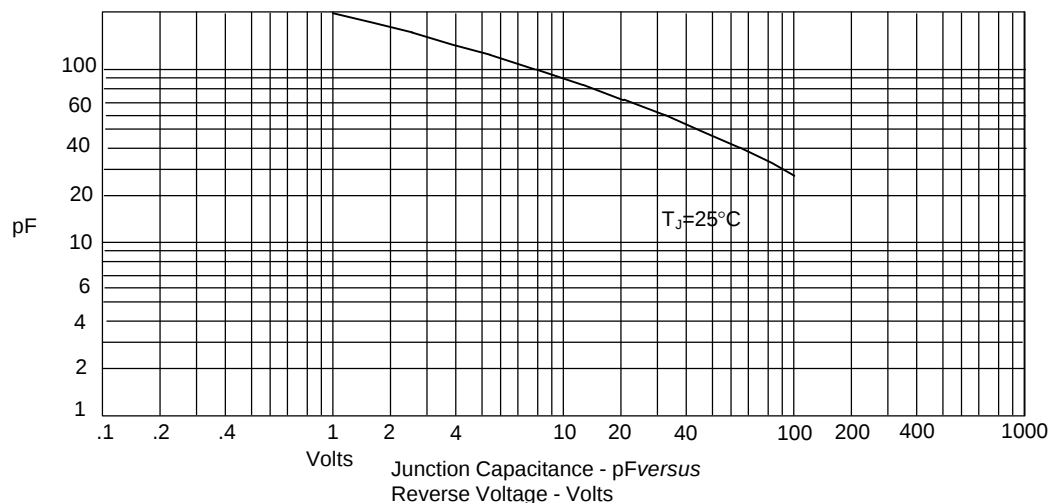

PG600R~PG6010R

Ordering Information

- Packing information

PG600R~PG6010R	Packing Quantity
Tape&Reel	13 Inch; 0.8kpcs/Reel
Ammo Packing	0.4kpcs/Ammo Box
Bulk(Tube/Box)	0.1kpcs/Box