

PS600R~PS6010R

FAST RECOVERY RECTIFIER



VOLTAGE 50 to 1000 Volt **CURRENT** 6 Ampere

FEATURES

- High current capability
- Low leakage
- Fast switching for high efficiency.
- Lead free in compliance with EU RoHS2.0 (2011/65/EU & 2015/865/EU directive)

MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

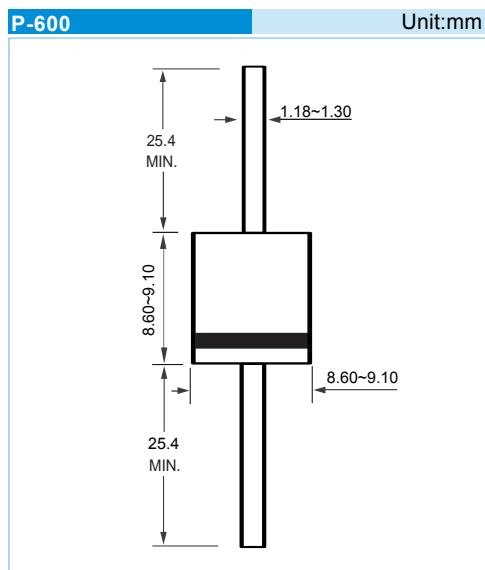


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	PS 600R	PS 601R	PS 602R	PS 604R	PS 606R	PS 608R	PS 6010R	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current (see FIG.1)	$I_{F(AV)}$	6							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	300							A
Maximum Forward Voltage @ 6 A	V_F	1.3							V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_J=25^{\circ}C$ $T_J=100^{\circ}C$	I_R	10 200							μA
Typical Junction Capacitance	C_J	150							pF
Maximum Reverse Recovery Time	t_{rr}	150				250	500		ns
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							$^{\circ}C$


PS600R~PS6010R

Figure 1
Typical Forward Characteristics

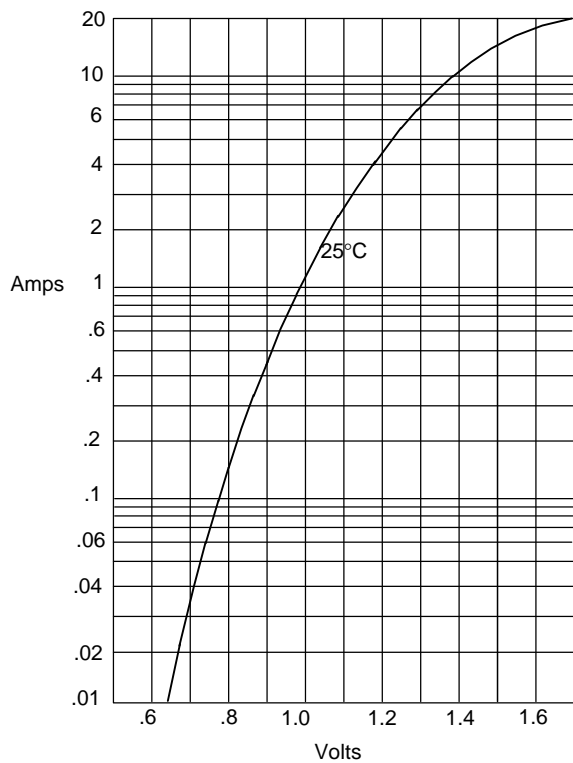

Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

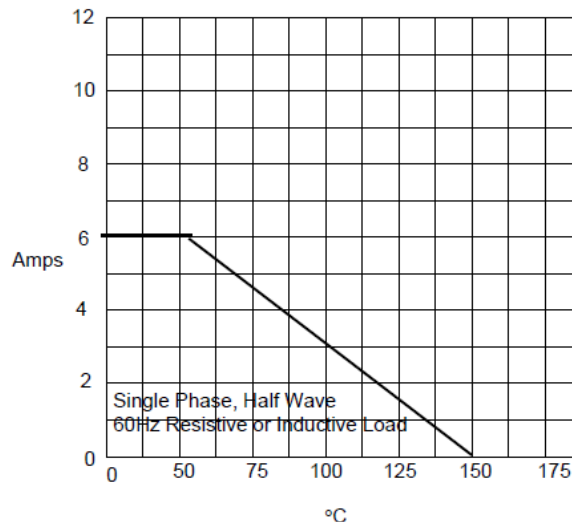

Average Forward Rectified Current - Amperes versus
Ambient Temperature - °C

Figure 4 MAXIMUM NON-REPETITIVE FORWARD
SURGE CURRENT


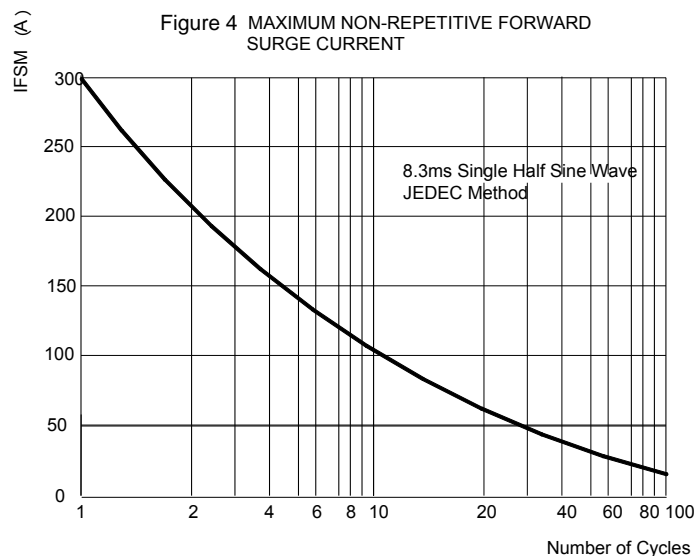


Figure 3
Junction Capacitance

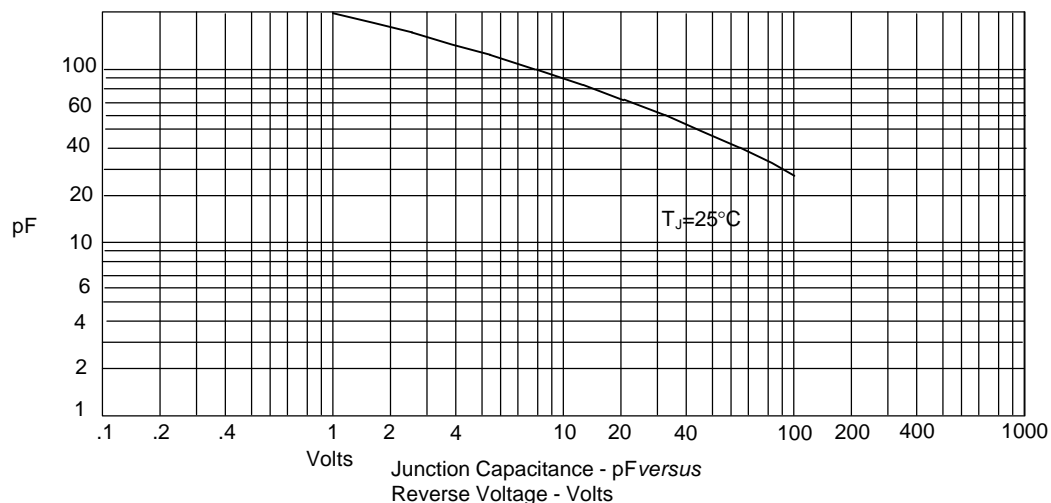

PS600R~PS6010R

Ordering Information

- Packing information

PS600R~PS6010R	Packing Quantity
Tape&Reel	13 Inch; 0.8kpcs/Reel
Ammo Packing	0.4kpcs/Ammo Box
Bulk(Tube/Box)	0.1kpcs/Box