

UF200~UF2010

ULTRAFAST RECOVERY RECTIFIERS

VOLTAGE	50 to 1000 Volt	CURRENT	2 Ampere
---------	-----------------	---------	----------



DO-15 Unit:mm

FEATURES

- Low Leakage Current
- High Current Capability
- Lead Free Finish/RoHS Compliant (Note1) ("P"Suffix designates Compliant. See ordering information)
- Ultra fast recovery for high efficiency
- Moisture Sensitivity Level 1

MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

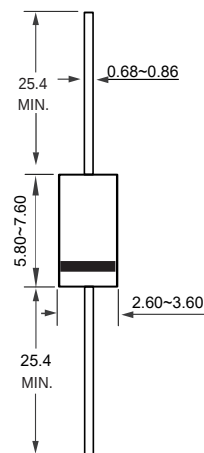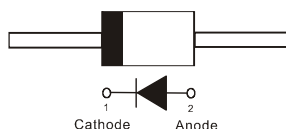

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.





PARAMETER	SYMBOL	UF200	UF201	UF202	UF204	UF206	UF208	UF2010	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current 0.375"(9.5mm) lead length at T _A =55°C	I _{F(AV)}	2							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	60							A
Maximum Forward Voltage at 2A	V _F	1.0			1.3	1.7			V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _J =25°C T _J = 100°C	I _R	10 200							μA
Typical Junction Capacitance (Note 1)	C _J	35							pF
Typical Thermal Resistance (Note 2)	R _{θJA}	45							°C / W
Maximum Reverse Recovery Time (Note 3)	t _{rr}	50				75			ns
Operating Junction and Storage Temperature Range	T _J ,T _{STG}	-55 to +150							°C

NOTES:

1. Measured at 1 MHz and applied reverse voltage of 4 VDC.
2. Thermal Resistance from Junction to Ambient and from Junction to lead length 0.375"(9.5mm) P.C.B. mounted
3. Reverse Recovery Time $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$

UF200~UF2010

RATING AND CHARACTERISTIC CURVES

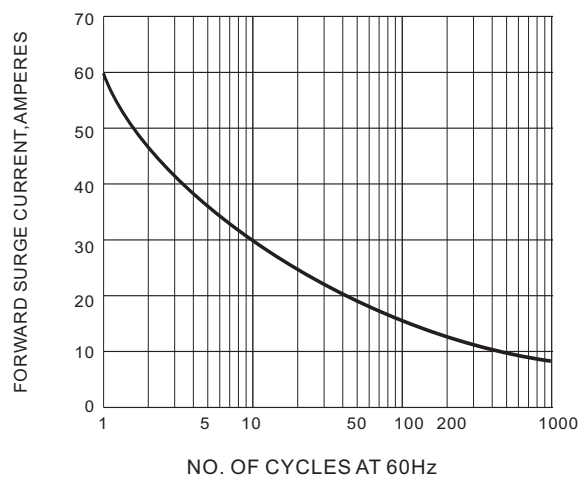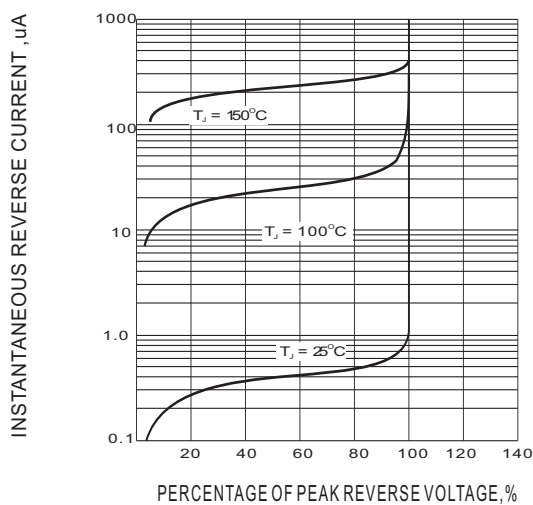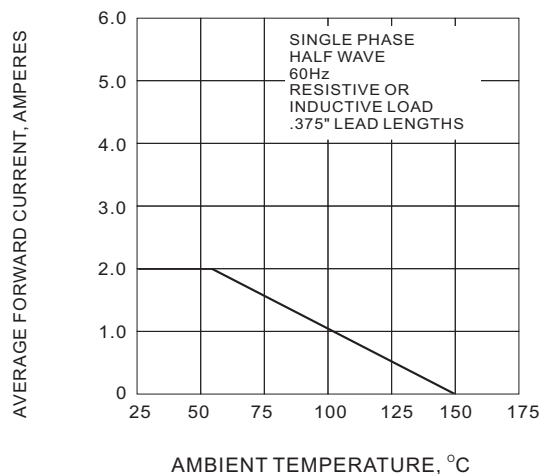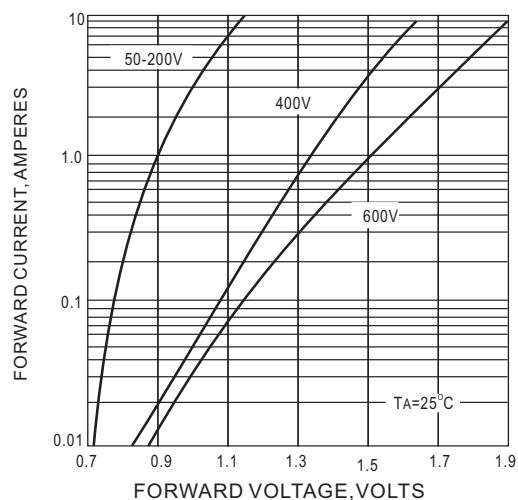

UF200~UF2010

ORDER INFORMATION

- Packing information

UF200~UF2010	Packing Quantity
Tape&Reel	13 Inch; 4kpcs/Reel
Ammo Packing	3kpcs/Ammo Box
Bulk(Tube/Box)	1kpcs/Box