

MTZJ2.0~MTZJ56

AXIAL LEAD ZENER DIODES

VOLTAGE 2.0 to 56 Volt

POWER 500 mWatt

DO-34



Unit : inch(mm)

FEATURES

- Planar Die construction
- 500mW Power Dissipation
- Ideally Suited for Automated Assembly Processes
- Lead free in compliance with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: Molded Glass DO-34
- Terminals: Solderable per MIL-STD-750, Method 2026
- Packing information
 - B/P - 2K per Bulk box
 - T/R - 10K per 15" Reel
 - T/B - 5K per horiz. tape & Ammo box

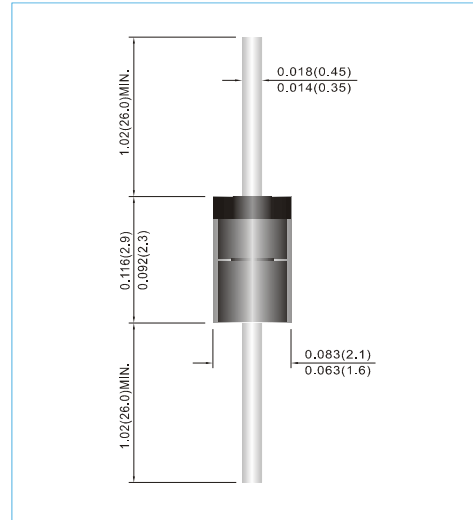

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T_A=25°C unless otherwise noted)

Parameter	Symbol	Value	Units
Power Dissipation on T _A =25°C	P _{TOT}	500	mW
Operating Junction Temperature Range	T _J	175	°C
Storage Temperature Range	T _{STG}	-65 to + 175	°C
Valid provided that leads at a distance of 10mm from case are kept at ambient perature.			

Parameter	Symbol	Min.	Typ.	Max.	Units
Thermal Resistance	R _{θJA}	-	-	0.3	°C/mW
Forward Voltage at I _F =100mA	V _F	-	-	1	V
Valid provided that leads at a distance of 10mm from case are kept at ambient perature.					

MTZJ2.0~MTZJ56

Part Number	Nominal Zener Voltage			Max. Zener Impedance				Max Reverse Leakage Current		Marking Code
	V _Z @ I _{ZT}			Z _{ZT} @ I _{ZT}		Z _{ZK} @ I _{ZK}		I _R @ V _R		
	Nom. V	Min. V	Max. V	Ω	mA	Ω	mA	μA	V	
500 mW Zener Diodes										
MTZJ 2.0A	2	1.88	2.1	100	5	1000	0.5	120	0.5	MJ2.0A
MTZJ 2.0B	2	2.02	2.2	100	5	1000	0.5	120	0.5	MJ2.0B
MTZJ 2.2A	2.2	2.12	2.3	100	5	1000	0.5	120	0.7	MJ2.2A
MTZJ 2.2B	2.2	2.22	2.41	100	5	1000	0.5	120	0.7	MJ2.2B
MTZJ 2.4A	2.4	2.33	2.52	100	5	1000	0.5	120	1	MJ2.4A
MTZJ 2.4B	2.4	2.43	2.63	100	5	1000	0.5	120	1	MJ2.4B
MTZJ 2.7A	2.7	2.54	2.75	110	5	1000	0.5	120	1	MJ2.7A
MTZJ 2.7B	2.7	2.69	2.91	110	5	1000	0.5	120	1	MJ2.7B
MTZJ 3.0A	3.0	2.85	3.07	120	5	1000	0.5	50	1	MJ3.0A
MTZJ 3.0B	3.0	3.01	3.22	120	5	1000	0.5	50	1	MJ3.0B
MTZJ 3.3A	3.3	3.16	3.38	120	5	1000	0.5	20	1	MJ3.3A
MTZJ 3.3B	3.3	3.32	3.53	120	5	1000	0.5	20	1	MJ3.3B
MTZJ 3.6A	3.6	3.46	3.69	100	5	1000	1	10	1	MJ3.6A
MTZJ 3.6B	3.6	3.6	3.84	100	5	1000	1	10	1	MJ3.6B
MTZJ 3.9A	3.9	3.74	4.01	100	5	1000	1	5	1	MJ3.9A
MTZJ 3.9B	3.9	3.89	4.16	100	5	1000	1	5	1	MJ3.9B
MTZJ 4.3A	4.3	4.04	4.29	100	5	1000	1	5	1	MJ4.3A
MTZJ 4.3B	4.3	4.17	4.43	100	5	1000	1	5	1	MJ4.3B
MTZJ 4.3C	4.3	4.3	4.57	100	5	1000	1	5	1	MJ4.3C
MTZJ 4.7A	4.7	4.44	4.68	90	5	900	1	5	1	MJ4.7A
MTZJ 4.7B	4.7	4.55	4.8	90	5	900	1	5	1	MJ4.7B
MTZJ 4.7C	4.7	4.68	4.93	90	5	900	1	5	1	MJ4.7C
MTZJ 5.1A	5.1	4.81	5.07	80	5	800	1	5	1.5	MJ5.1A
MTZJ 5.1B	5.1	4.94	5.2	80	5	800	1	5	1.5	MJ5.1B
MTZJ 5.1C	5.1	5.09	5.37	80	5	800	1	5	1.5	MJ5.1C
MTZJ 5.6A	5.6	5.28	5.55	60	5	500	1	5	2.5	MJ5.6A
MTZJ 5.6B	5.6	5.45	5.73	60	5	500	1	5	2.5	MJ5.6B
MTZJ 5.6C	5.6	5.61	5.91	60	5	500	1	5	2.5	MJ5.6C
MTZJ 6.2A	6.2	5.78	6.09	60	5	300	1	5	3	MJ6.2A
MTZJ 6.2B	6.2	5.96	6.27	60	5	300	1	5	3	MJ6.2B
MTZJ 6.2C	6.2	6.12	6.44	60	5	300	1	5	3	MJ6.2C
MTZJ 6.8A	6.8	6.29	6.63	20	5	150	0.5	2	3.5	MJ6.8A
MTZJ 6.8B	6.8	6.49	6.83	20	5	150	0.5	2	3.5	MJ6.8B
MTZJ 6.8C	6.8	6.66	7.01	20	5	150	0.5	2	3.5	MJ6.8C
MTZJ 7.5A	7.5	6.85	7.22	20	5	120	0.5	0.5	4	MJ7.5A
MTZJ 7.5B	7.5	7.07	7.45	20	5	120	0.5	0.5	4	MJ7.5B
MTZJ 7.5C	7.5	7.29	7.67	20	5	120	0.5	0.5	4	MJ7.5C
MTZJ 8.2A	8.2	7.53	7.92	20	5	120	0.5	0.5	5	MJ8.2A
MTZJ 8.2B	8.2	7.78	8.19	20	5	120	0.5	0.5	5	MJ8.2B
MTZJ 8.2C	8.2	8.03	8.45	20	5	120	0.5	0.5	5	MJ8.2C
MTZJ 9.1A	9.1	8.29	8.73	25	5	120	0.5	0.5	6	MJ9.1A
MTZJ 9.1B	9.1	8.57	9.01	25	5	120	0.5	0.5	6	MJ9.1B
MTZJ 9.1C	9.1	8.83	9.3	25	5	120	0.5	0.5	6	MJ9.1C
MTZJ 10A	10	9.12	9.59	30	5	120	0.5	0.2	7	MJ10A
MTZJ 10B	10	9.41	9.9	30	5	120	0.5	0.2	7	MJ10B
MTZJ 10C	10	9.7	10.2	30	5	120	0.5	0.2	7	MJ10C
MTZJ 10D	10	9.94	10.44	30	5	120	0.5	0.2	7	MJ10D
MTZJ 11A	11	10.18	10.71	30	5	120	0.5	0.2	8	MJ11A
MTZJ 11B	11	10.5	11.05	30	5	120	0.5	0.2	8	MJ11B
MTZJ 11C	11	10.82	11.38	30	5	120	0.5	0.2	8	MJ11C

MTZJ2.0~MTZJ56

Part Number	Nominal Zener Voltage			Max. Zener Impedance				Max Reverse Leakage Current		Marking Code
	V _Z @ I _{ZT}			Z _{zT} @ I _{ZT}		Z _{zK} @ I _{zK}		I _R @ V _R		
	Nom. V	Min. V	Max. V	Ω	mA	Ω	mA	μA	V	
500 mW Zener Diodes										
MTZJ 12A	12	11.13	11.71	30	5	110	0.5	0.2	9	MJ12A
MTZJ 12B	12	11.44	12.03	30	5	110	0.5	0.2	9	MJ12B
MTZJ 12C	12	11.74	12.35	30	5	110	0.5	0.2	9	MJ12C
MTZJ 13A	13	12.11	12.75	35	5	110	0.5	0.2	10	MJ13A
MTZJ 13B	13	12.55	13.21	35	5	110	0.5	0.2	10	MJ13B
MTZJ 13C	13	12.99	13.66	35	5	110	0.5	0.2	10	MJ13C
MTZJ 15A	15	13.44	14.13	40	5	110	0.5	0.2	11	MJ15A
MTZJ 15B	15	13.89	14.62	40	5	110	0.5	0.2	11	MJ15B
MTZJ 15C	15	14.35	15.09	40	5	110	0.5	0.2	11	MJ15C
MTZJ 16A	16	14.8	15.57	40	5	150	0.5	0.2	12	MJ16A
MTZJ 16B	16	15.25	16.04	40	5	150	0.5	0.2	12	MJ16B
MTZJ 16C	16	15.69	16.51	40	5	150	0.5	0.2	12	MJ16C
MTZJ 18A	18	16.22	17.06	45	5	150	0.5	0.2	13	MJ18A
MTZJ 18B	18	16.82	17.7	45	5	150	0.5	0.2	13	MJ18B
MTZJ 18C	18	17.42	18.33	45	5	150	0.5	0.2	13	MJ18C
MTZJ 20A	20	18.02	18.96	55	5	200	0.5	0.2	15	MJ20A
MTZJ 20B	20	18.63	19.59	55	5	200	0.5	0.2	15	MJ20B
MTZJ 20C	20	19.23	20.22	55	5	200	0.5	0.2	15	MJ20C
MTZJ 20D	20	19.72	20.72	55	5	200	0.5	0.2	15	MJ20D
MTZJ 22A	22	20.15	21.2	30	5	200	0.5	0.2	17	MJ22A
MTZJ 22B	22	20.64	21.71	30	5	200	0.5	0.2	17	MJ22B
MTZJ 22C	22	21.08	22.17	30	5	200	0.5	0.2	17	MJ22C
MTZJ 22D	22	21.52	22.63	30	5	200	0.5	0.2	17	MJ22D
MTZJ 24A	24	22.05	23.18	35	5	200	0.5	0.2	19	MJ24A
MTZJ 24B	24	22.61	23.77	35	5	200	0.5	0.2	19	MJ24B
MTZJ 24C	24	23.12	24.31	35	5	200	0.5	0.2	19	MJ24C
MTZJ 24D	24	23.63	24.85	35	5	200	0.5	0.2	19	MJ24D
MTZJ 27A	27	24.26	25.52	45	5	250	0.5	0.2	21	MJ27A
MTZJ 27B	27	24.97	26.26	45	5	250	0.5	0.2	21	MJ27B
MTZJ 27C	27	25.63	26.95	45	5	250	0.5	0.2	21	MJ27C
MTZJ 27D	27	26.29	27.64	45	5	250	0.5	0.2	21	MJ27D
MTZJ 30A	30	26.99	28.39	55	5	250	0.5	0.2	23	MJ30A
MTZJ 30B	30	27.7	29.13	55	5	250	0.5	0.2	23	MJ30B
MTZJ 30C	30	28.36	29.82	55	5	250	0.5	0.2	23	MJ30C
MTZJ 30D	30	29.02	30.51	55	5	250	0.5	0.2	23	MJ30D
MTZJ 33A	33	29.68	31.22	65	5	250	0.5	0.2	25	MJ33A
MTZJ 33B	33	30.32	31.88	65	5	250	0.5	0.2	25	MJ33B
MTZJ 33C	33	30.90	32.5	65	5	250	0.5	0.2	25	MJ33C
MTZJ 33D	33	31.49	33.11	65	5	250	0.5	0.2	25	MJ33D
MTZJ 36A	36	32.14	33.79	75	5	250	0.5	0.2	27	MJ36A
MTZJ 36B	36	32.79	34.49	75	5	250	0.5	0.2	27	MJ36B
MTZJ 36C	36	33.4	35.13	75	5	250	0.5	0.2	27	MJ36C
MTZJ 36D	36	34.01	35.77	75	5	250	0.5	0.2	27	MJ36D
MTZJ 39A	39	34.68	36.47	85	5	250	0.5	0.2	30	MJ39A
MTZJ 39B	39	35.36	37.19	85	5	250	0.5	0.2	30	MJ39B
MTZJ 39C	39	36	37.85	85	5	250	0.5	0.2	30	MJ39C
MTZJ 39D	39	36.63	38.52	85	5	250	0.5	0.2	30	MJ39D
MTZJ 43	43	40	45	90	5	-	-	0.2	33	MJ43
MTZJ 47	47	44	49	90	5	-	-	0.2	36	MJ47
MTZJ 51	51	48	54	110	5	-	-	0.2	39	MJ51
MTZJ 56	56	53	60	110	5	-	-	0.2	43	MJ56

MTZJ2.0~MTZJ56

RATING AND CHARACTERISTIC CURVES

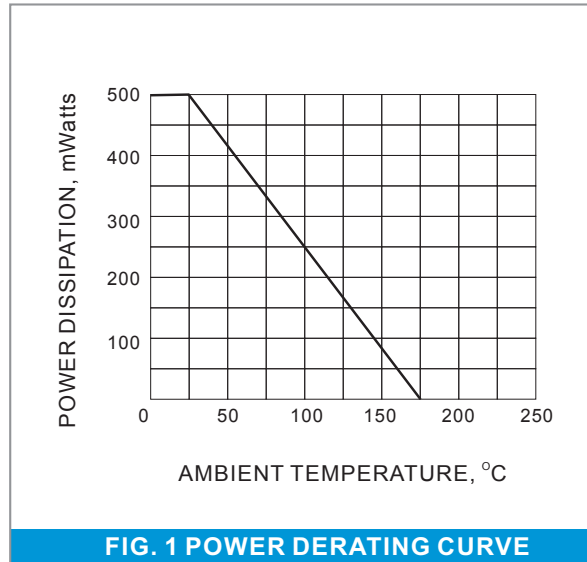


FIG. 1 POWER DERATING CURVE

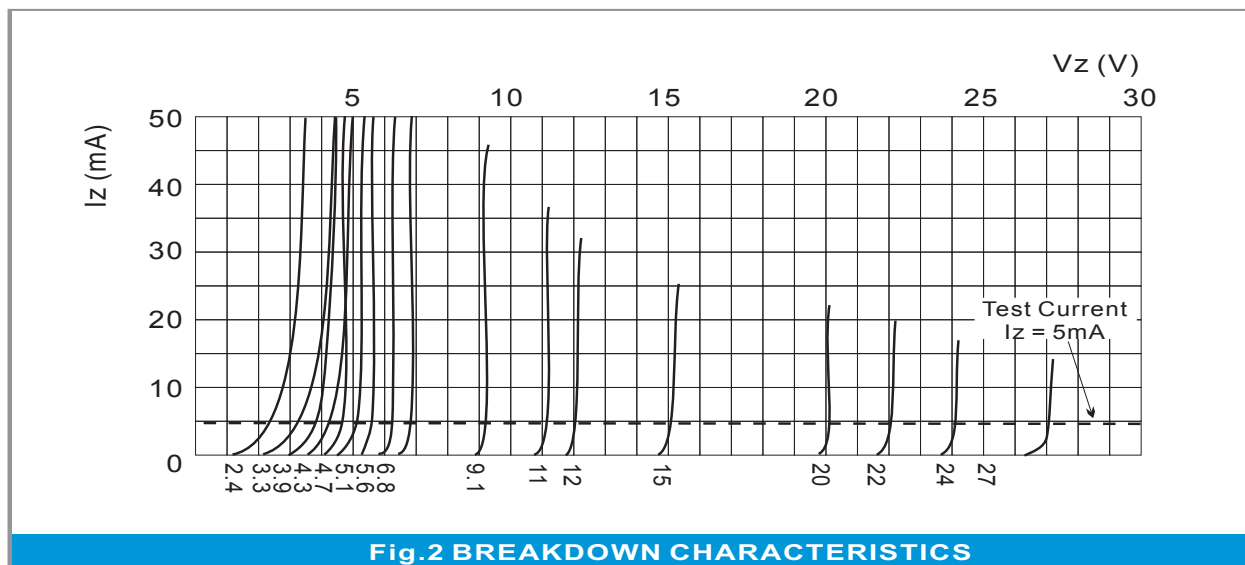


Fig.2 BREAKDOWN CHARACTERISTICS

MTZJ2.0~MTZJ56

Part No_packing code_Version

MTZJ2.0A_AX_10001
 MTZJ2.0A_AY_10001
 MTZJ2.0A_B0_10001
 MTZJ2.0A_R2_10001

For example :

RB500V-40_R2_00001



Packing Code XX				Version Code XXXXX		
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code
Tape and Ammunition Box (T/B)	A	N/A	0	HF	0	serial number
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number
Bulk Packing (B/P)	B	13"	2			
Tube Packing (T/P)	T	26mm	X			
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y			
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U			
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D			

MTZJ2.0~MTZJ56

Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Siyang Grande Electronics Co., Ltd..
- Siyang Grande Electronics Co., Ltd. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Siyang Grande Electronics Co., Ltd. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Siyang Grande Electronics Co., Ltd. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Siyang Grande Electronics Co., Ltd. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Siyang Grande Electronics Co., Ltd. for any damages resulting from such improper use or sale.
- Since Grande uses lot number as the tracking base, please provide the lot number for tracking when complaining.