

UMC4N

DUAL DIGITAL TRANSISTORS (NPN+PNP)


VOLTAGE 50 Volt **POWER** 150 mWatt

SOT-353

Unit:mm



FEATURES

- DTC144E and DTA114Y transistors are built-in a package
- Lead free in compliance with EU RoHS
- MARKING: C4



MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

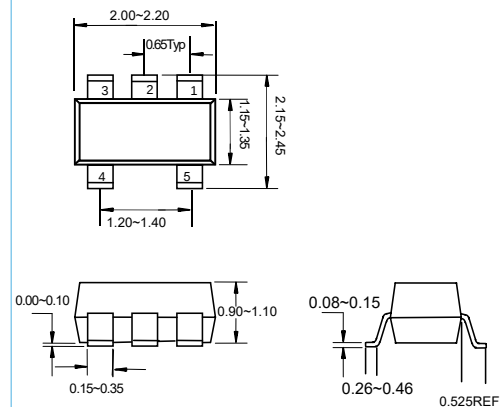

NPN DTC144E Absolute maximum ratings (T_a=25°C)

Parameter	Symbol	Value	Unit
Supply voltage	V _{CC}	50	V
Input voltage	V _{IN}	-10~40	V
Output current	I _O	100	mA
	I _{C(MAX)}	100	
Power dissipation	P _C	150	mW
Junction temperature	T _j	150	°C
Storage temperature	T _{stg}	-55~150	°C

Electrical characteristics (T_a=25°C)

Parameter	Symbol	Min.	Typ	Max.	Unit	Conditions
Input voltage	V _{I(off)}	0.5			V	V _{CC} =5V, I _O =100μA
	V _{I(on)}			3		V _O =0.3V, I _O =2mA
Output voltage	V _{O(on)}			0.3	V	I _O /I _I =10mA/0.5mA
Input current	I _I			0.18	mA	V _I =5V
Output current	I _{O(off)}			0.5	μA	V _{CC} =50V, V _I =0
DC current gain	G _I	68				V _O =5V, I _O =5mA
Input resistance	R ₁	32.9	47	61.1	KΩ	
Resistance ratio	R ₂ /R ₁	0.8	1	1.2		
Transition frequency	f _T		250		MHz	V _{CE} =10V, I _E =-5mA, f=100MHz

UMC4N

PNP DTA114Y Absolute maximum ratings ($T_a=25^{\circ}\text{C}$)







Parameter	Symbol	Value	Unit
Supply voltage	V_{CC}	-50	V
Input voltage	V_{IN}	-40~ +6	V
Output current	I_O	-70	mA
	$I_{C(MAX)}$	-100	
Power dissipation	P_C	150	mW
Junction temperature	T_j	150	$^{\circ}\text{C}$
Storage temperature	T_{stg}	-55~150	$^{\circ}\text{C}$

Electrical characteristics ($T_a=25^{\circ}\text{C}$)

Parameter	Symbol	Min.	Typ	Max.	Unit	Conditions
Input voltage	$V_{I(off)}$	-0.3			V	$V_{CC}=-5V, I_O=-100\mu A$
	$V_{I(on)}$			-1.4		$V_O=-0.3V, I_O=-1mA$
Output voltage	$V_{O(on)}$			-0.3	V	$I_O/I_I=-5mA/-0.25mA$
Input current	I_I			-0.88	mA	$V_I=-5V$
Output current	$I_{O(off)}$			-0.5	μA	$V_{CC}=-50V, V_I=0$
DC current gain	G_I	68				$V_O=-5V, I_O=-5mA$
Input resistance	R_1	7	10	13	K Ω	
Resistance ratio	R_2/R_1	3.7	4.7	5.7		
Transition frequency	f_T		250		MHz	$V_{CE}=-10V, I_E=5mA, f=100MHz$







UMC4N

Typical Characteristics(NPN)

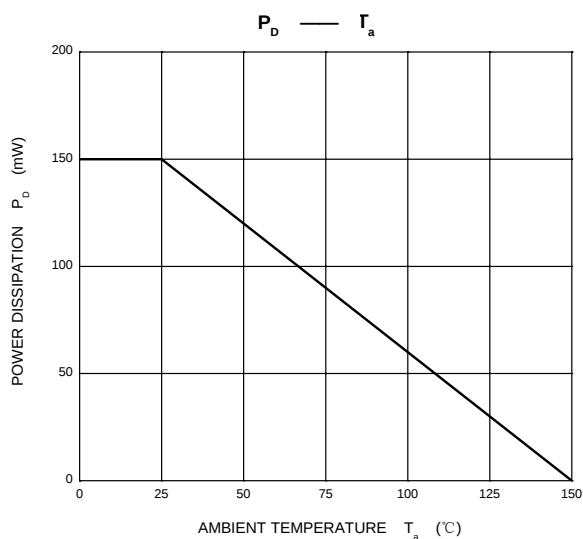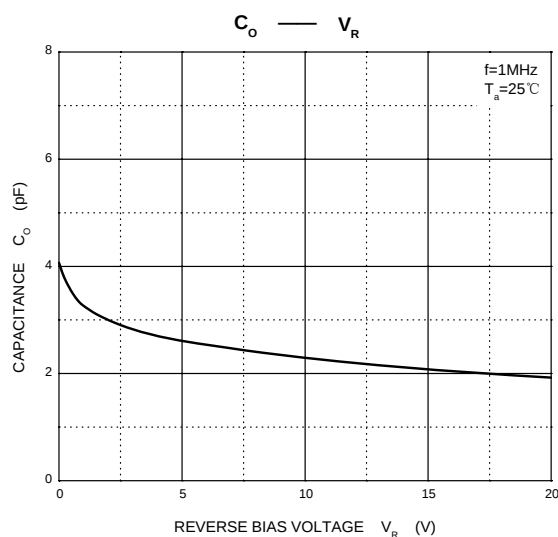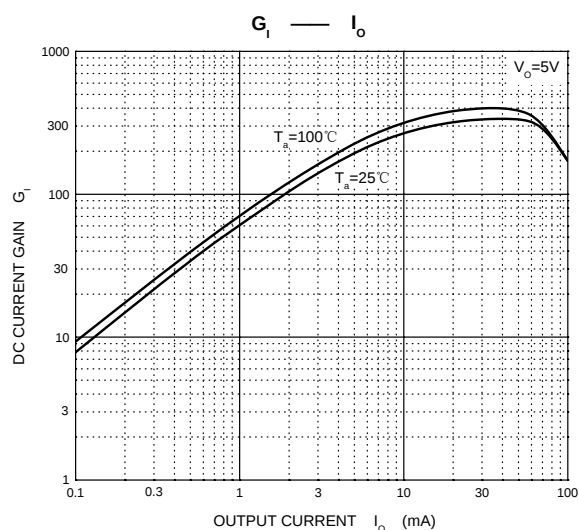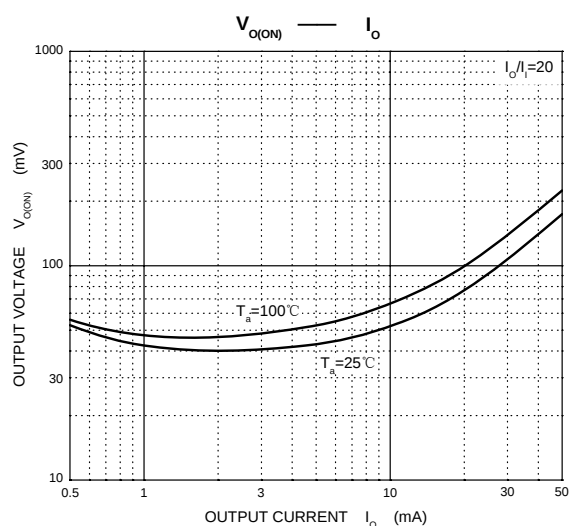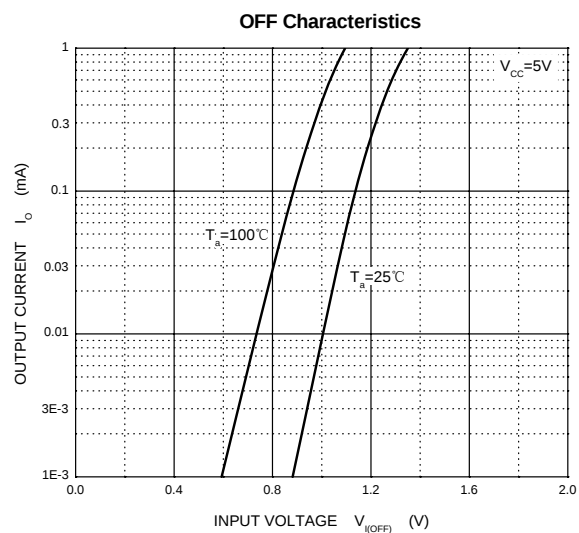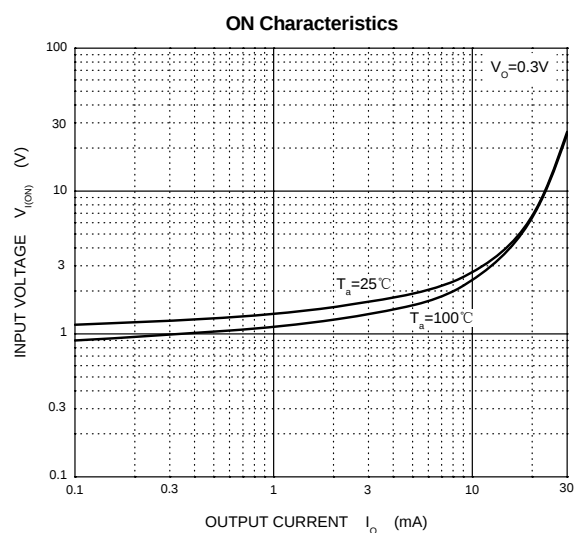

UMC4N

Typical Characteristics(PNP)

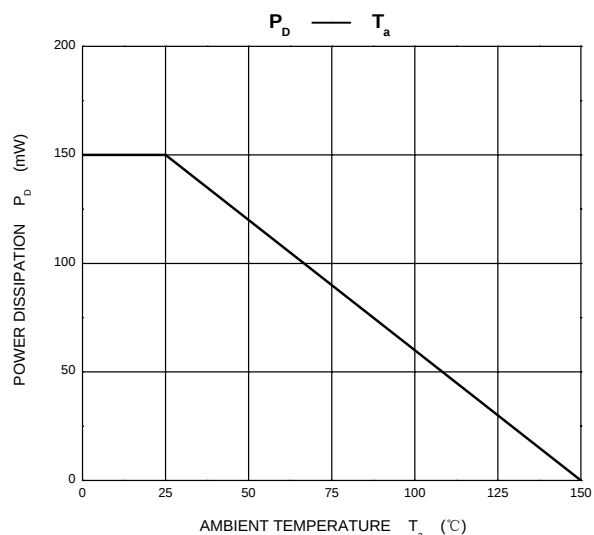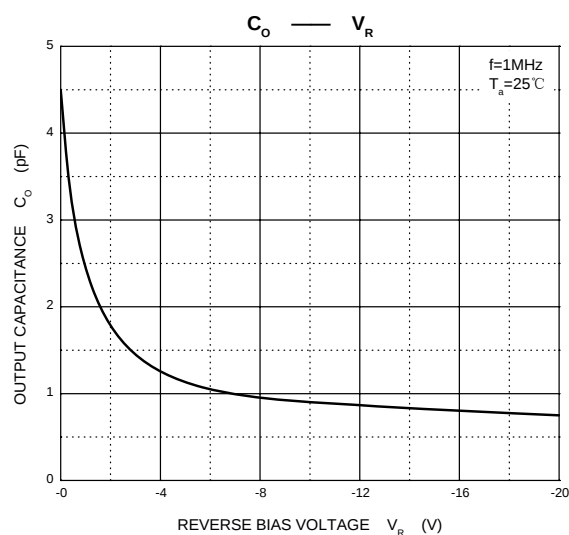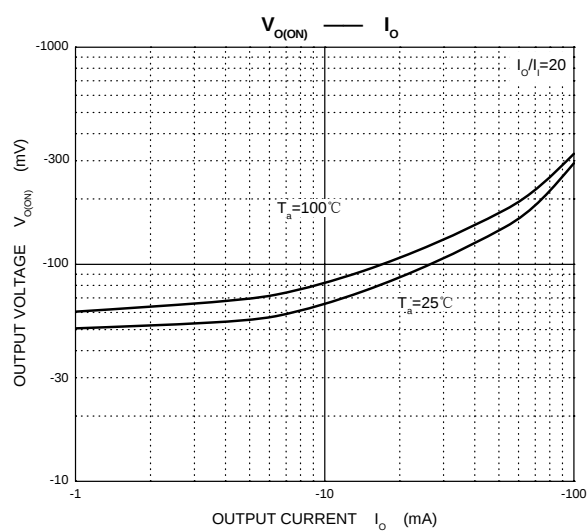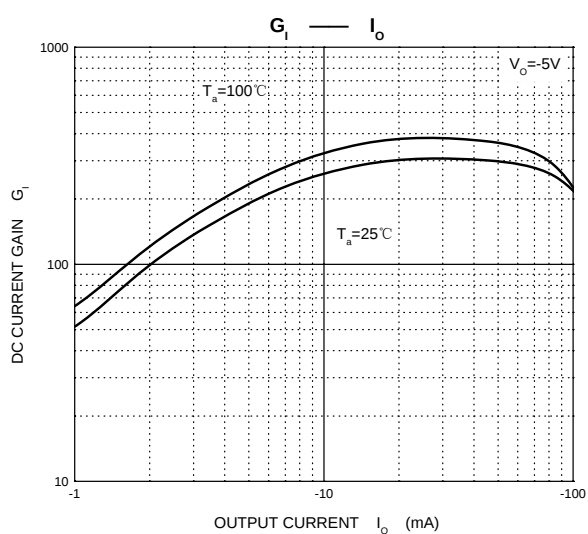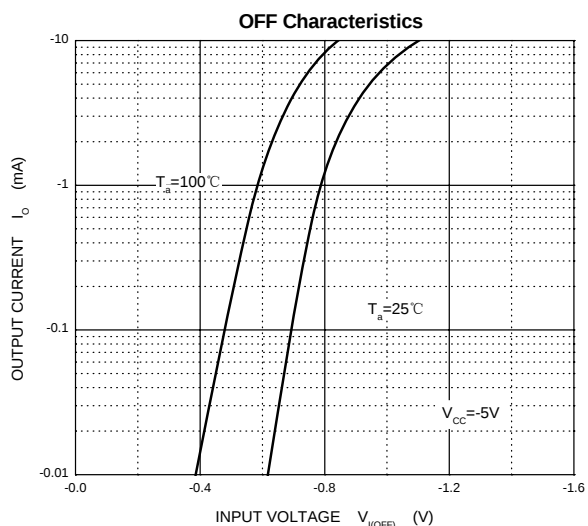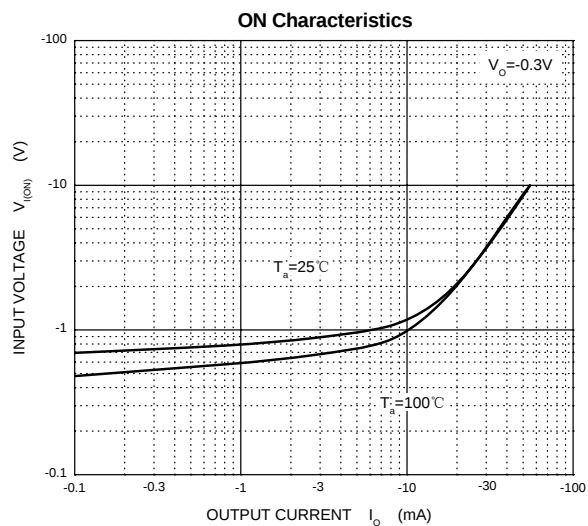


UMC4N

MOUNTING PAD LAYOUT

SOT-353

Unit:mm

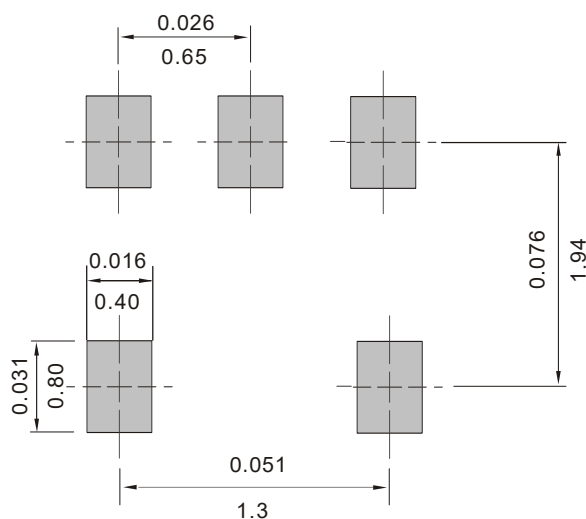

ORDER INFORMATION

- Packing information

Part Number	Case	Reel Size	QUANTITY
UMC4N	SOT-353	7 Inch	3000