

GBU8A~GBU8M

BRIDGE RECTIFIERS


VOLTAGE 50 to 1000 Volt **CURRENT** 8 Ampere

FEATURES

- Glass passivated chip junction
- High surge current capability
- High Current Capability
- Ideal for Printed Circuit Boards
- Lead free in compliance with EU RoHS

MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

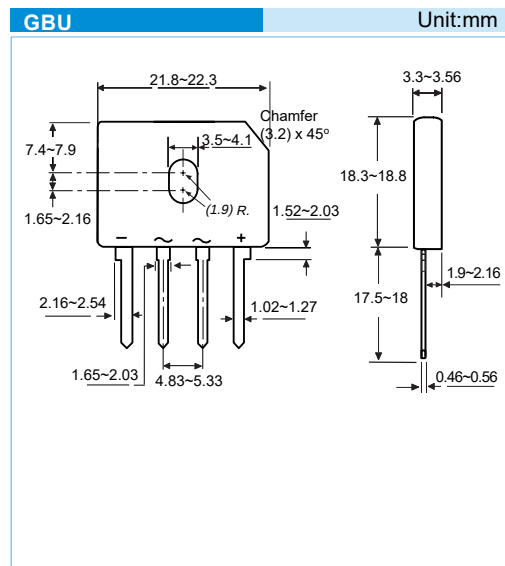

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	GBU8A	GBU8B	GBU8D	GBU8G	GBU8J	GBU8K	GBU8M	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current (see FIG.1)	$I_{F(AV)}$	8							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	200							A
Maximum Forward Voltage at 4.0 A	V_F	1.0							V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$	I_R	5 500							μA
Thermal Resistance(Note1)	$R_{\theta JA}$	18							$^\circ\text{C} / \text{W}$
Typical Junction Capacitance(Note2)	C_J	60							pF
Operating Junction Temperature Range	T_J	-55 to +150							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150							$^\circ\text{C}$

NOTES:

1. Thermal resistance junction to case, mounted on 7.5 x 7.5 x 0.3cm thick AL plate.
2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

GBU8A~GBU8M

RATING AND CHARACTERISTIC CURVES

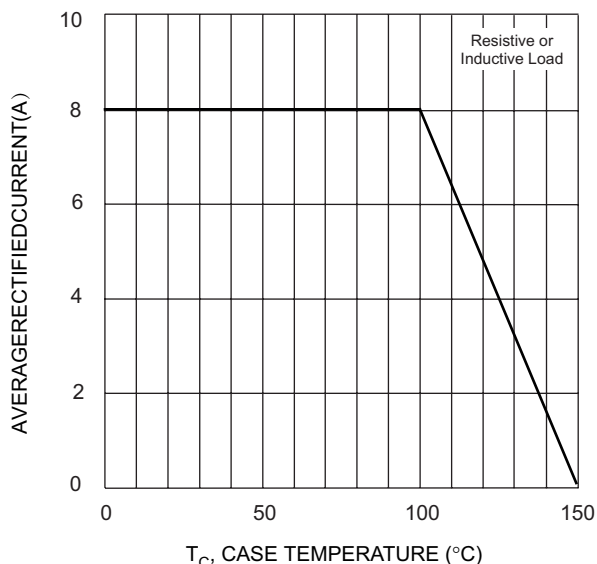


Fig. 1 Forward Current Derating Curve

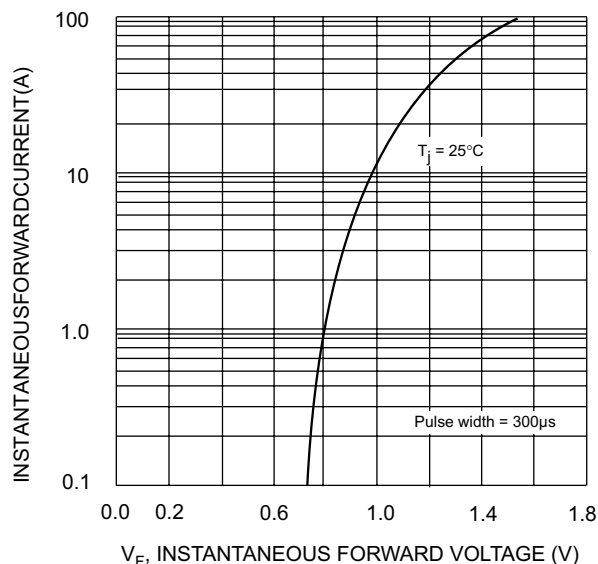


Fig. 2 Typical Forward Characteristics

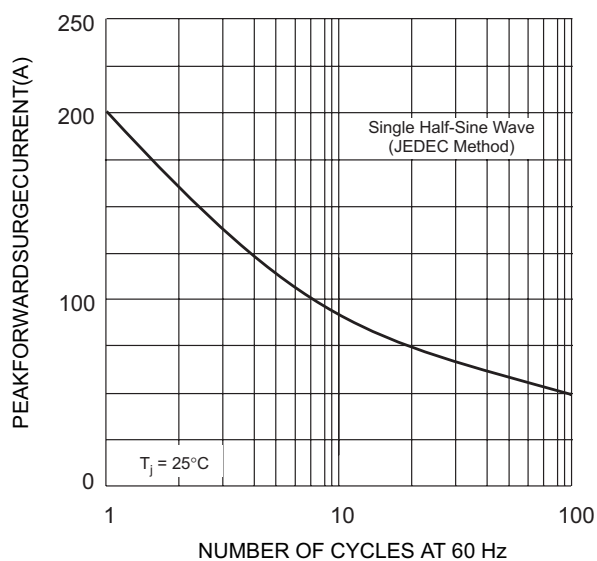


Fig. 3 Maximum Non-Repetitive Surge Current

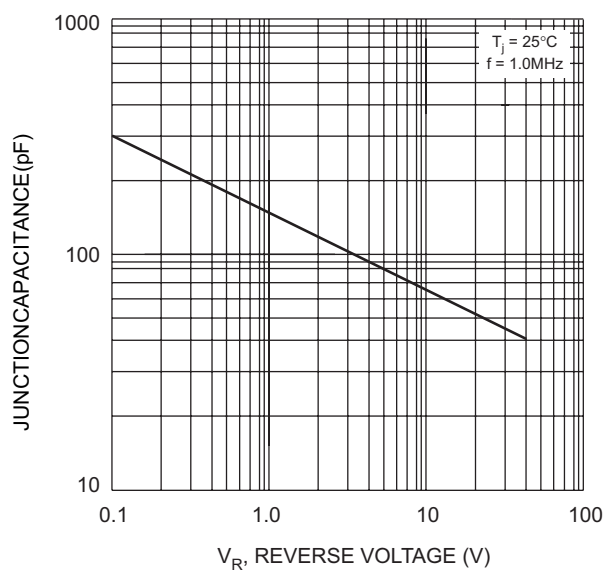


Fig. 4 Typical Junction Capacitance

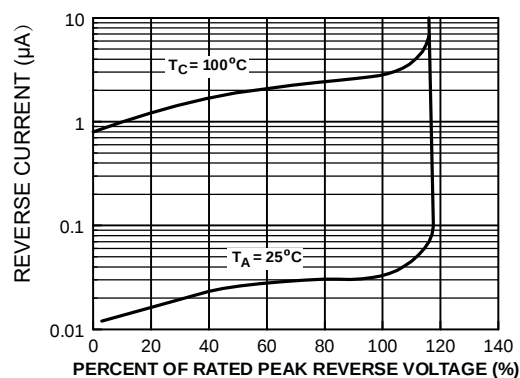


Fig. 5 Reverse Characteristics

GBU8A~GBU8M

ORDER INFORMATION

- Packing information

Part Number	Case	DELIVERY MODE	QUANTITY
GBU8A~GBU8M	GBU	BULK	2000/Ctn