

KBJ10005G~KBJ1010G

BRIDGE RECTIFIERS


VOLTAGE	50 to 1000 Volt	CURRENT	10 Ampere
---------	-----------------	---------	-----------

FEATURES

- Glass passivated chip junction
- Low Forward Voltage Drop
- High Current Capability
- High reliability
- Lead free in compliance with EU RoHS

MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

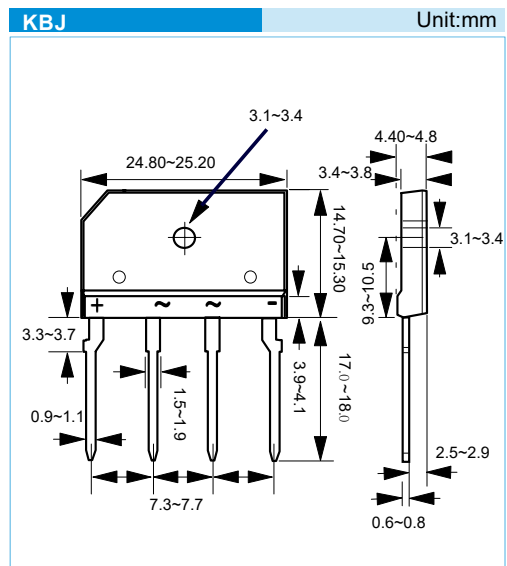

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	KBJ10005G	KBJ1001G	KBJ1002G	KBJ1004G	KBJ1006G	KBJ1008G	KBJ1010G	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Current (see FIG.1)	$I_{F(AV)}$	10							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	170							A
Maximum Forward Voltage at 5 A	V_F	1.1							V
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_J = 25^\circ\text{C}$ $T_J = 100^\circ\text{C}$	I_R	5 500							μA
Thermal Resistance	$R_{\theta JC}$	2.3							$^\circ\text{C/W}$
I^2t Rating for fusing	I^2t	120							A^2S
Typical Junction Capacitance (Note1)	C_J	55							pF
Operating Junction Temperature Range	T_J	-55 to $+150$							$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 to $+150$							$^\circ\text{C}$

NOTES:

1. Measured at 1.0MHz and applied reverse voltage of 4.0 volt

KBJ10005G~KBJ1010G

RATING AND CHARACTERISTIC CURVES

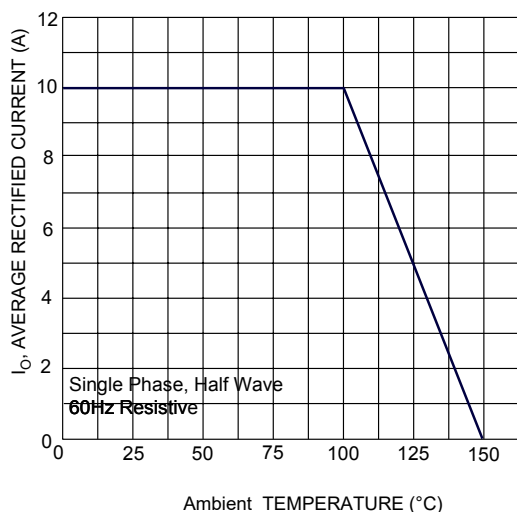


Fig. 1 Forward Current Derating Curve

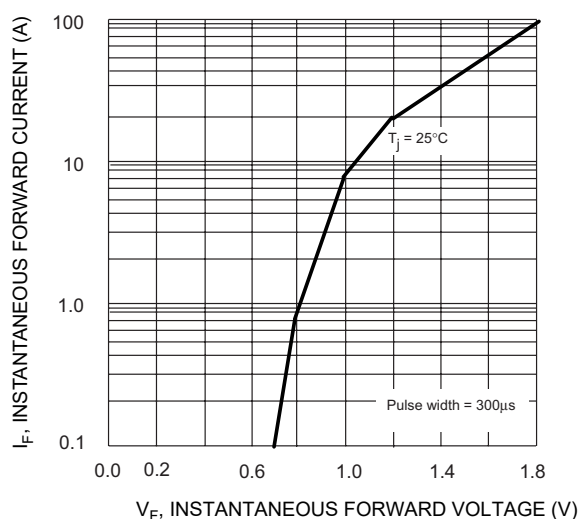


Fig. 2 Typical Forward Characteristics

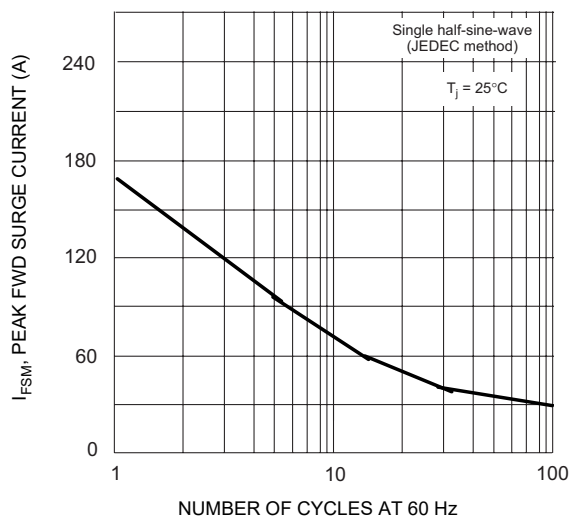


Fig. 3 Max Non-Repetitive Surge Current

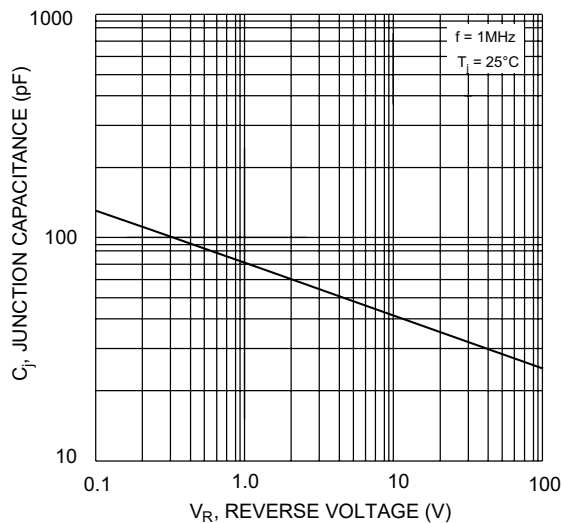


Fig. 4 Typical Junction Capacitance

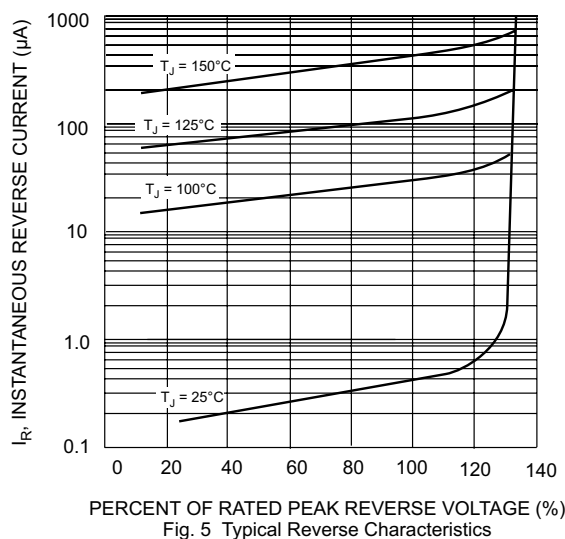


Fig. 5 Typical Reverse Characteristics

KBJ10005G~KBJ1010G

ORDER INFORMATION

- Packing information

Part Number	Case	DELIVERY MODE	QUANTITY
KBJ10005G~KBJ1010G	KBJ	BULK	1000/BOX