

ARU0540D4

ESD Protection Diode

VOLTAGE 5 Volt


FEATURES

- Ultra low capacitance
- Ultra low leakage
- Low operating voltage: 5V
- Low clamping voltage
- Up to 4 lines protects
- IEC 61000-4-2 ±25KV air ; ±20KV contact
- IEC 61000-4-5 (Lightning) 4A (8/20μs)
- Lead free in compliance with EU RoHS
- Marking code: 0524

MECHANICAL DATA


- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

Circuit Diagram



DFN2510-10

Unit:mm

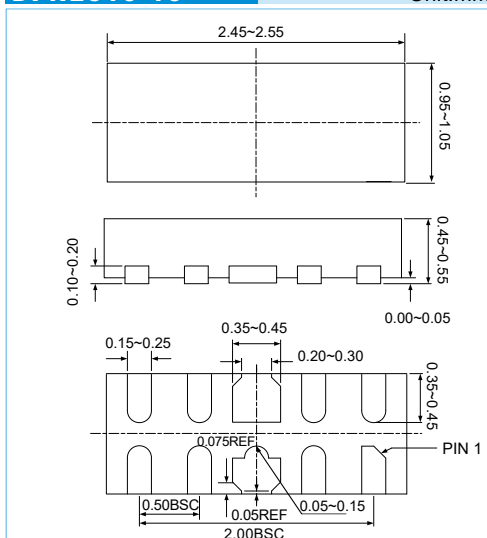


ABSOLUTE MAXIMUM RATINGS($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	P_{PP}	60	W
Peak Pulse Current (8/20μs)	I_{PP}	4	A
Junction Temperature	T_J	-55 to +125	$^\circ\text{C}$
Storage temperature	T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical Parameters ($T=25^\circ\text{C}$)

Symbol	Parameter
I_{PP}	Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_R
I_T	Test Current

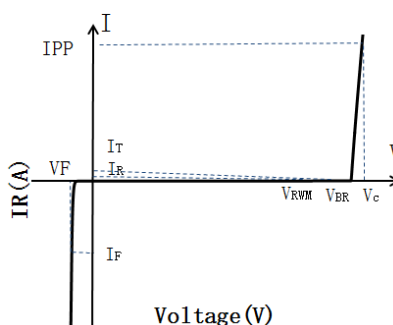


ELECTRICAL CHARACTERISTICS($T_A = 25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Condition	Min	Typ	Max	Unit
Reverse stand-off Voltage	V_{RWM}				5	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	6.0	7.5	8.5	V
Reverse Leakage Current	I_R	$V_R=5\text{V}$			0.5	μA
Clamping Voltage	V_C	$I_{PP}=1\text{A}$, $t_p=8/20\mu\text{s}$			9	V
	V_C	$I_{PP}=4\text{A}$, $t_p=8/20\mu\text{s}$			15	V
Junction Capacitance	C_J	$V_R=0\text{V}$, $f=1\text{MHz}$		0.6	0.8	pF

ARU0540D4


Typical Characteristics

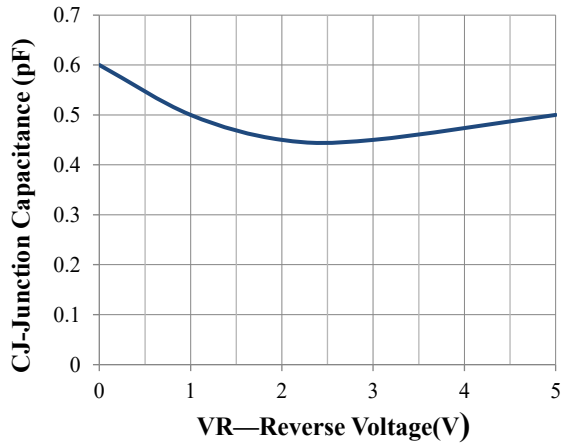


Junction Capacitance vs. Reverse Voltage

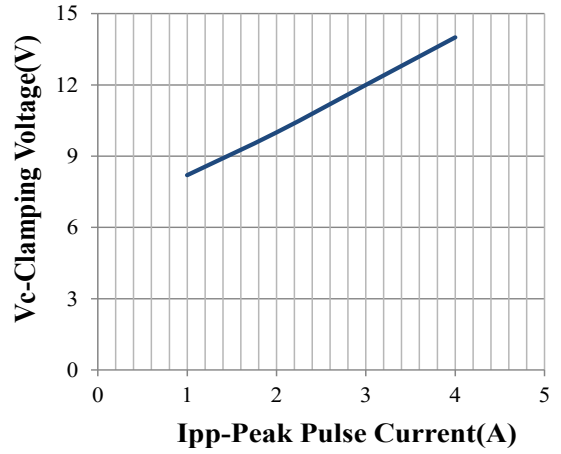


Clamping Voltage vs. Peak Pulse Current

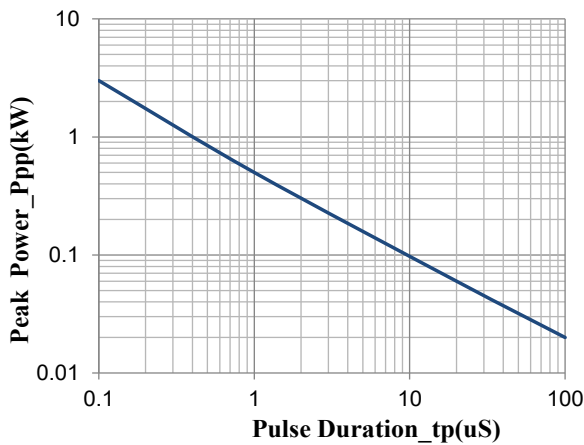


Peak Pulse Power vs. Pulse Time

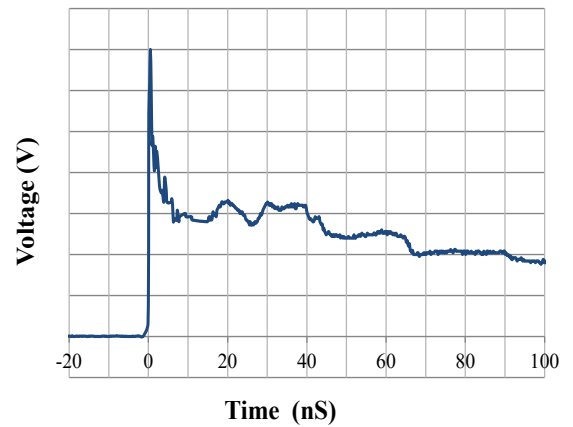

IEC61000-4-2 Pulse Waveform

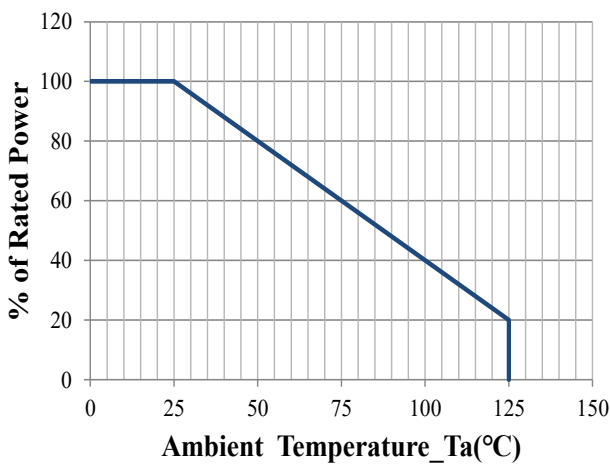


Power Derating Curve

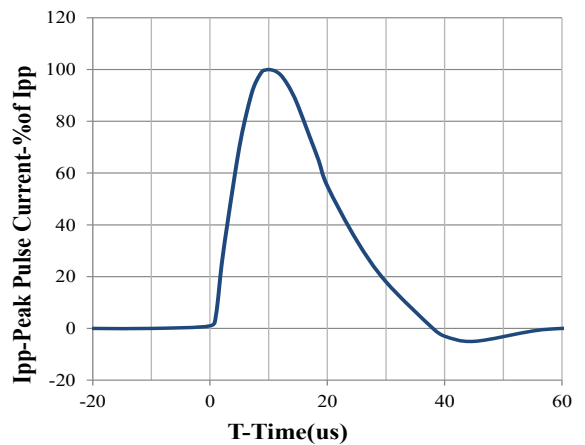

8 X 20us Pulse Waveform

ARU0540D4

MOUNTING PAD LAYOUT

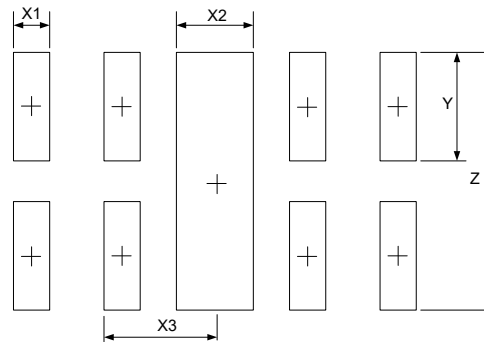

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
X1	0.200	0.008
X2	0.400	0.016
X3	0.500	0.020
Y	0.600	0.024
Z	1.400	0.056

ORDER INFORMATION

- Packing information

Part Number	Case	Reel Size	QUANTITY
ARU0540D4	DFN2510-10	7 Inch	3000