

GES5VD3

ESD Protection Diode

VOLTAGE 5.0 Volt

FEATURES

- Uni-directional ESD protection of one line
- Low reverse clamping voltage
- Low leakage current
- IEC 61000-4-2 $\pm 25\text{KV}$ air, $\pm 25\text{KV}$ contact
- Lead free in compliance with EU RoHS


MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0



Schematic Diagram

SOD-323 Unit:mm

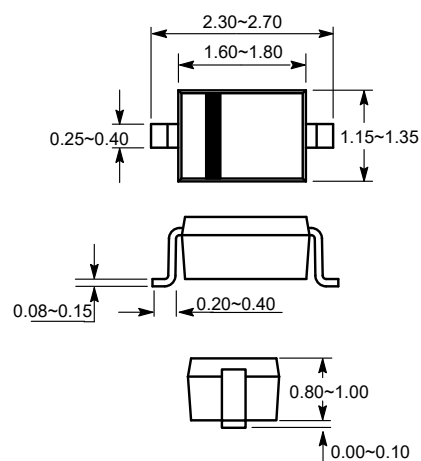

ABSOLUTE MAXIMUM RATINGS($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
JESD22-A114-B ESD Voltage Per Human Body Model	$V_{\text{ESD}}^{(1)}$	± 16	kV
ESD Voltage Machine Model		± 0.4	
Peak Pulse Power	$P_{\text{PP}}^{(2)}$	170	W
Peak Pulse Current	$I_{\text{PP}}^{(2)}$	13	A
Junction Temperature	T_j	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 ~ +150	$^\circ\text{C}$


(1).Device stressed with ten non-repetitive ESD pulses.

(2).Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5.

GES5VD3

ELECTRICAL PARAMETER

Symbol	Parameter
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Peak Pulse Current
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_R	Reverse Leakage Current @ V_{RWM}
V_{RWM}	Reverse Standoff Voltage
V_F	Forward Voltage @ I_F
I_F	Forward Current

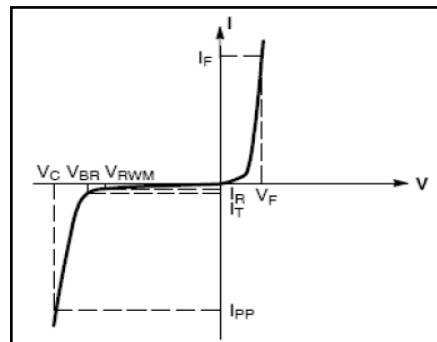

V-I characteristics for a uni-directional TVS

ELECTRICAL CHARACTERISTICS($T_A = 25^\circ\text{C}$ unless otherwise noted)





Parameter	mbol	Test conditions	Min	Typ	Max	Unit
Reverse stand off voltage	$V_{RWM}^{(3)}$				5.0	V
Reverse leakage current	I_R	$V_{RWM}=3.3\text{V}$			10	μA
Breakdown voltage	$V_{(BR)}$	$I_T=1\text{mA}$	6.2		7.3	V
Clamping voltage	$V_C^{(4)}$	$I_{PP}=13\text{A}$			13	V
Forward voltage	V_F	$I_F=10\text{mA}$			0.9	V
Junction capacitance	C_J	$V_R=0\text{V}, f=1\text{MHz}$		95		pF

(3).Other voltages available upon request.

(4).Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5

GES5VD3

Typical Characteristics

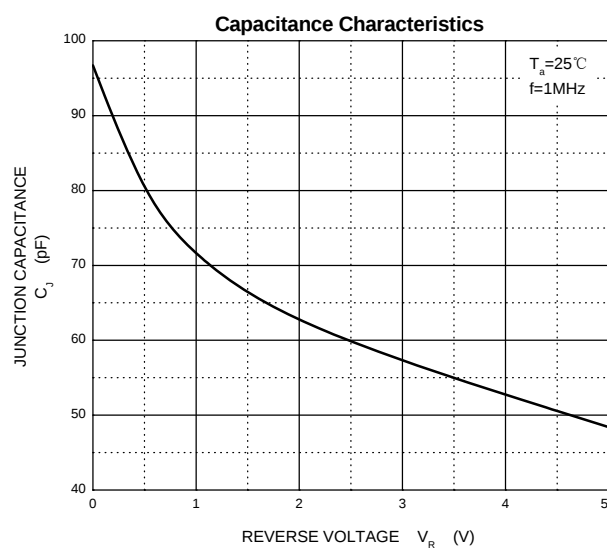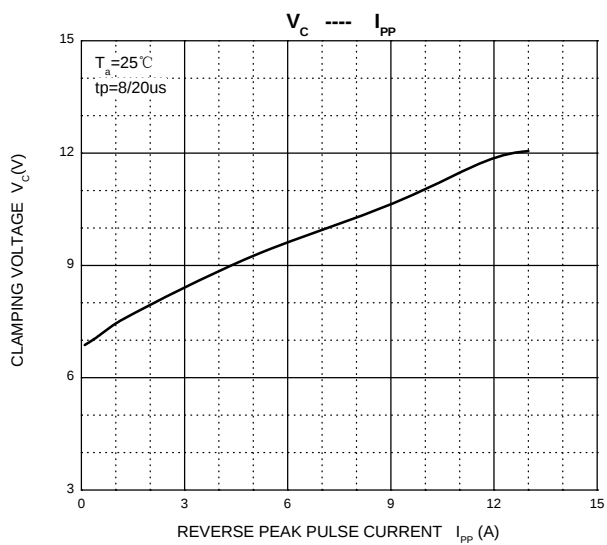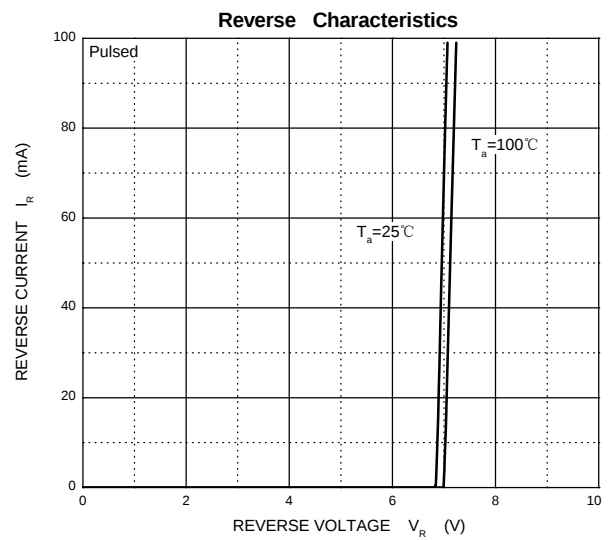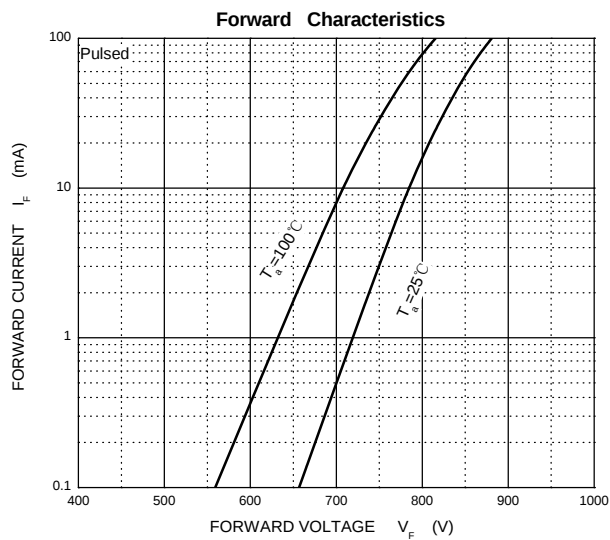


GES5VD3

MOUNTING PAD LAYOUT

SOD-323

Unit:Inch(mm)

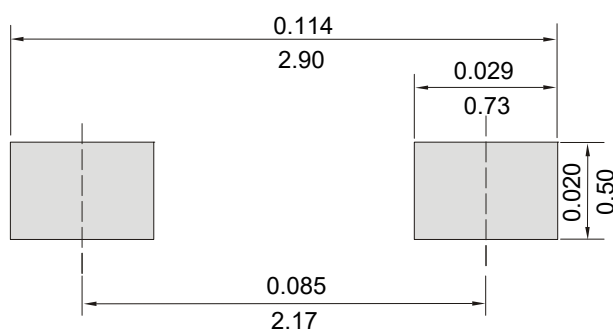

ORDER INFORMATION

- Packing information

Part Number	Case	Reel Size	QUANTITY
GES5VD3	SOD-323	7 Inch	3000