

# GESBLC5VD5

## ESD Protection Diode

**VOLTAGE** 5 Volt

### FEATURES

- Bi-directional ESD protection of one line
- Low reverse clamping voltage
- Low leakage current
- IEC 61000-4-2 ±25KV air ,±25KV contact
- Lead free in compliance with EU RoHS


### MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0



Schematic Diagram

**SOD-523** Unit:mm

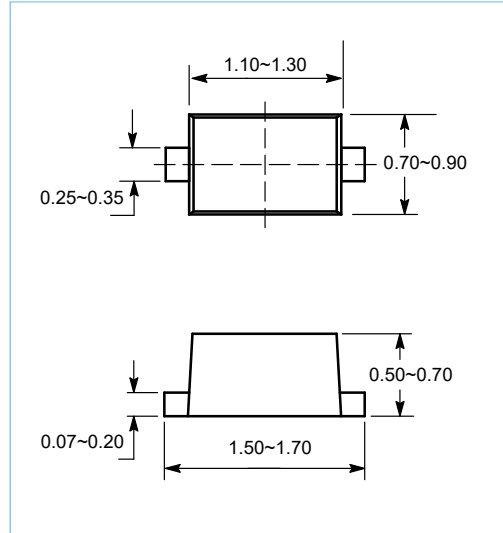

### ABSOLUTE MAXIMUM RATINGS( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
JESD22-A114-B ESD Voltage	$V_{ESD}^{(1)}$	±16	kV
ESD Voltage		±0.4	
Peak Pulse Power	$P_{PP}^{(2)}$	50	W
Peak Pulse Current	$I_{PP}^{(2)}$	5	A
Junction Temperature	$T_j$	150	°C
Storage Temperature Range	$T_{stg}$	-55 ~ +150	°C


(1).Device stressed with ten non-repetitive ESD pulses.

(2).Non-repetitive current pulse 8/20µs exponential decay waveform according to IEC61000-4-5.

# GESBLC5VD5

## ELECTRICAL PARAMETER

Symbol	Parameter
$V_C$	Clamping Voltage @ $I_{PP}$
$I_{PP}$	Peak Pulse Current
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{RWM}$	Reverse Standoff Voltage
$V_F$	Forward Voltage@ $I_F$
$I_F$	Forward Current

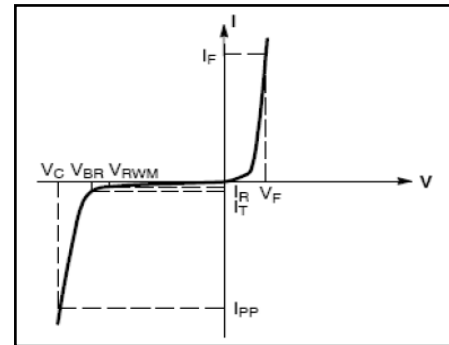

V-I characteristics for a uni-directional TVS

## ELECTRICAL CHARACTERISTICS( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	mbol	Test conditions	Min	Typ	Max	Unit
Reverse stand off voltage	$V_{RWM}^{(3)}$				5.0	V
Reverse leakage current	$I_R$	$V_{RWM}=5.0V$			0.1	$\mu\text{A}$
Breakdown voltage	$V_{(BR)}$	$I_T=1\text{mA}$	5.8		8.3	V
Clamping voltage	$V_C^{(4)}$	$I_{PP}=5A$			10	V
Junction capacitance	$C_J$	$V_R=0V, f=1\text{MHz}$		12	15	pF


(3).Other voltages available upon request.

(4).Non-repetitive current pulse 8/20 $\mu\text{s}$  exponential decay waveform according to IEC61000-4-5


# GESBLC5VD5

## Typical Characteristics


Reverse Characteristics

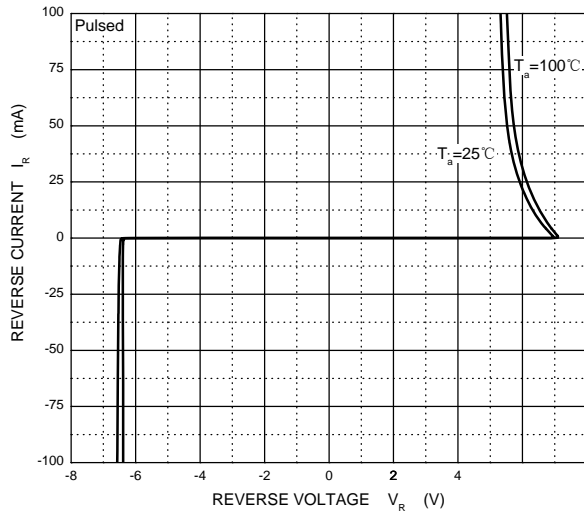

Capacitance Characteristics

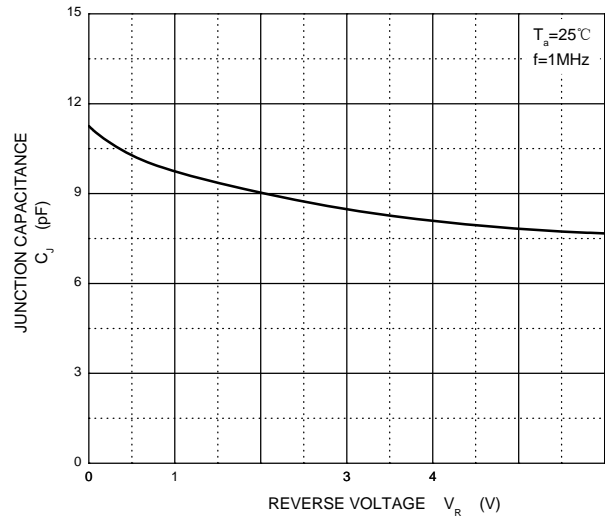

$V_C$  —  $I_{PP}$

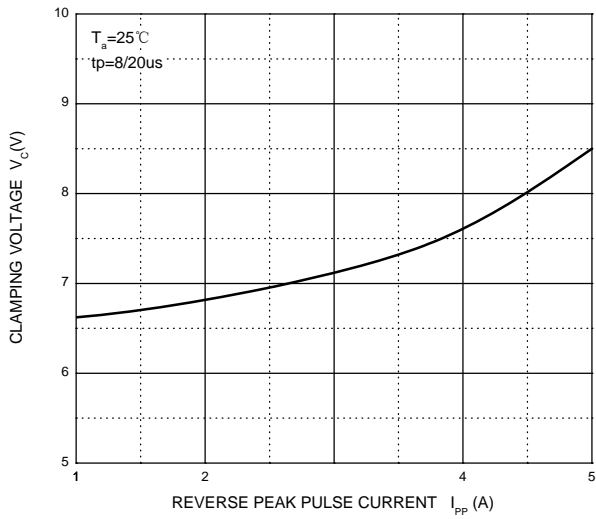


# GESBLC5VD5

## MOUNTING PAD LAYOUT

### SOD-523

Unit:Inch(mm)

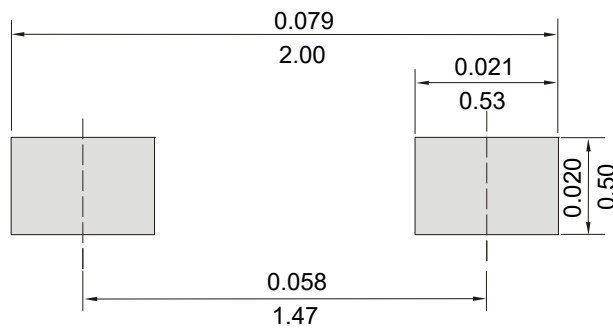

## ORDER INFORMATION

- Packing information

Part Number	Case	Reel Size	QUANTITY
GESBLC5VD5	SOD-523	7 Inch	8000