

SS22PL~SS210PL

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE	20 to 100 Volt	CURRENT	2 Ampere
---------	----------------	---------	----------


SOD-123FL Unit:mm

FEATURES

- Low power loss, High efficiency
- High surge capacity
- High current capacity, low V_F
- Lead free in compliance with EU RoHS 2.0

MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

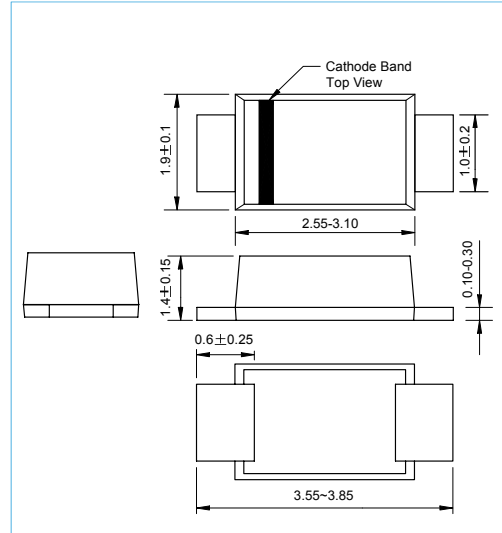

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load.

PARAMETER	SYMBOL	SS22PL	SS23PL	SS24PL	SS25PL	SS26PL	SS28PL	SS210PL	UNITS
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	V
Maximum RMS Voltage	V _{RMS}	14	21	28	35	42	56	70	V
Maximum DC Blocking Voltage	V _{DC}	20	30	40	50	60	80	100	V
Maximum Average Forward Current	I _{F(AV)}	2							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I _{FSM}	50							A
Maximum Forward Voltage at 2 A	V _F	0.50			0.70		0.85		V
Maximum DC Reverse Current at Rated DC Blocking Voltage T _J =25°C T _J =100°C	I _R	0.5 20							mA
Thermal Resistance	R _{θJA} R _{θJL}	60 21							°C / W
Typical Junction Capacitance c _e	C _J	210							pF
Operating Junction Temperature Range	T _J	125							°C
Storage Temperature Range	T _{STG}	-55 to + 150							°C

SS22PL~SS210PL

RATING AND CHARACTERISTIC CURVES

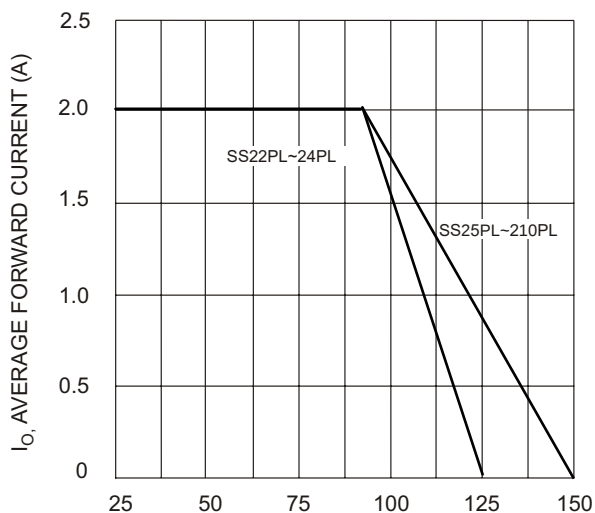


Fig. 1 Forward Current Derating Curve

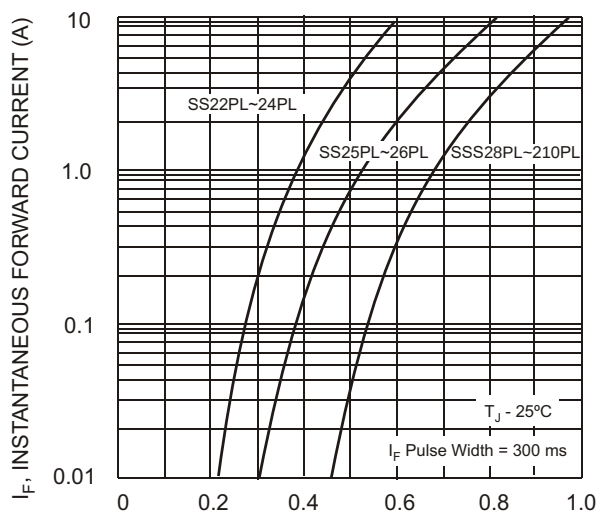


Fig. 2 Typical Forward Characteristics

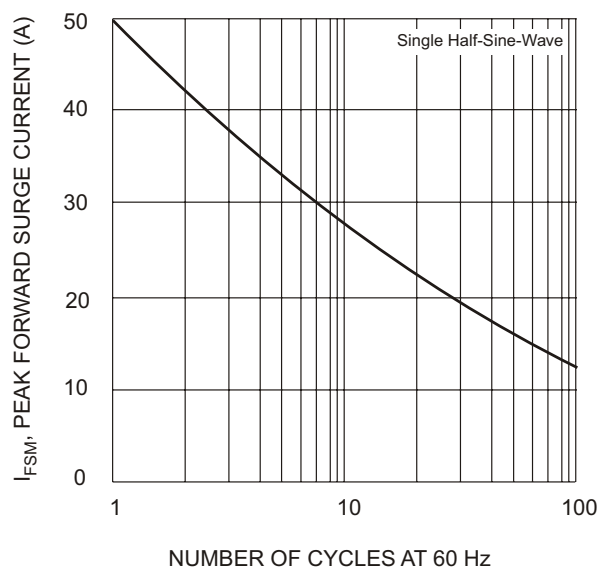


Fig. 3 Max Non-Repetitive Peak Forward Surge Current

SS22PL~SS210PL

ORDER INFORMATION

- Packing information

Part Number	Case	Reel Size	QUANTITY
SS22PL~SS210PL	SOD-123FL	7 Inch	2500