

1SS184

SWITCHING DIODE

VOLTAGE 80 Volt **POWER** 150 mW

SOT-23



Unit:mm

FEATURES

- Fast Switching Speed
- Low Reverse Current
- Lead free in compliance with EU RoHS
- Marking code: B3

MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

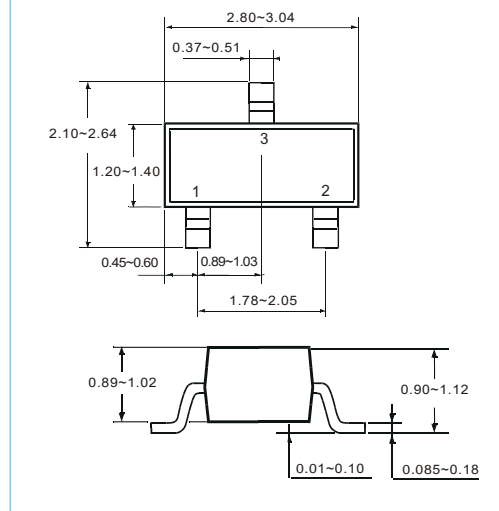

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS($T_A = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Units
Peak reverse voltage	V_{RM}	85	V
Reverse voltage	V_R	80	V
Forward Continuous Current	I_{FM}	300	mA
Average Rectified Output Current	I_O	100	mA
Non-repetitive Peak Forward surge current @ $t=8.3\text{ms}$	I_{FSM}	2.0	A
Power dissipation	P_D	150	mW
Thermal resistance junction to ambient	$R_{\theta JA}$	833	$^\circ\text{C/W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 to +150	$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Conditions	Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	($I_R = 100 \mu\text{A}$)	80			V
Reverse current	I_R	($V_R = 30 \text{V}$)			0.1	μA
		($V_R = 80 \text{V}$)			0.5	μA
Forward Voltage	V_F	($I_F = 1.0 \text{mA}$)		0.60		V
		($I_F = 10 \text{mA}$)		0.72		
		($I_F = 100 \text{mA}$)		0.90	1.20	
Total Capacitance	C_T	($V_R = 0 \text{V}$, $f = 1.0 \text{MHz}$)		0.9	3.0	pF
Reverse Recovery Time	t_{rr}	$I_F=10\text{mA}$, $I_R=10\text{mA}$, $I_{rr}=0.1 \times I_R$, $R_L=100 \Omega$		1.6	4.0	ns


1SS184

Typical Characteristics


Forward Characteristics

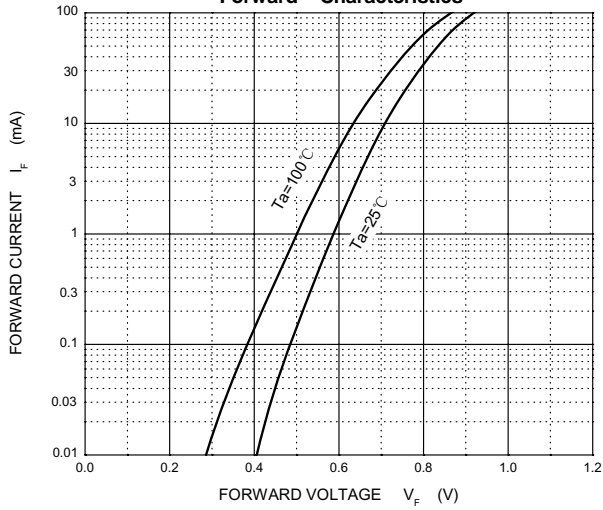


Reverse Characteristics

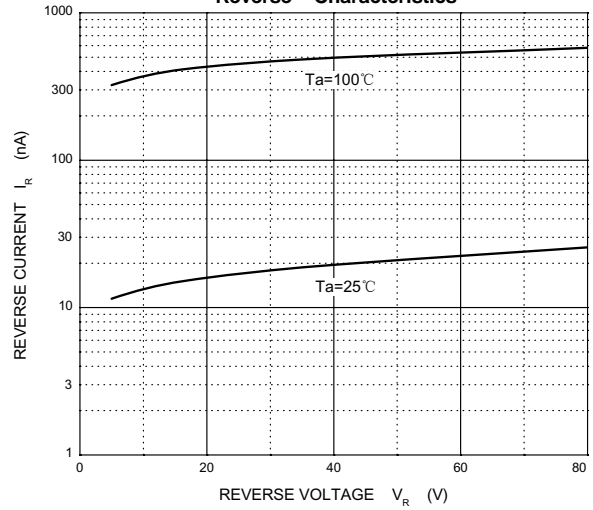

Capacitance Characteristics

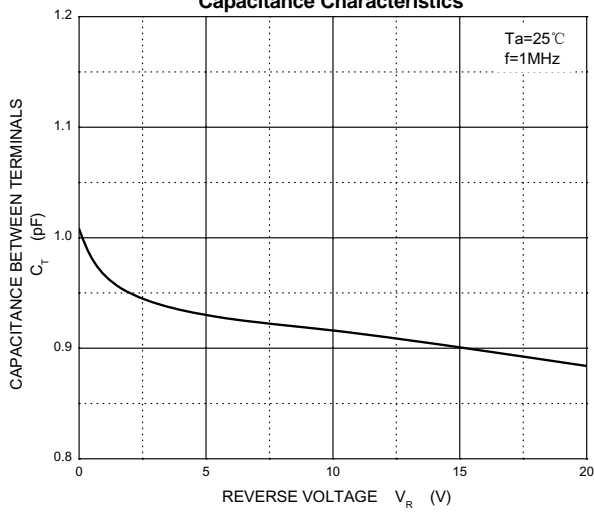

Power Derating Curve

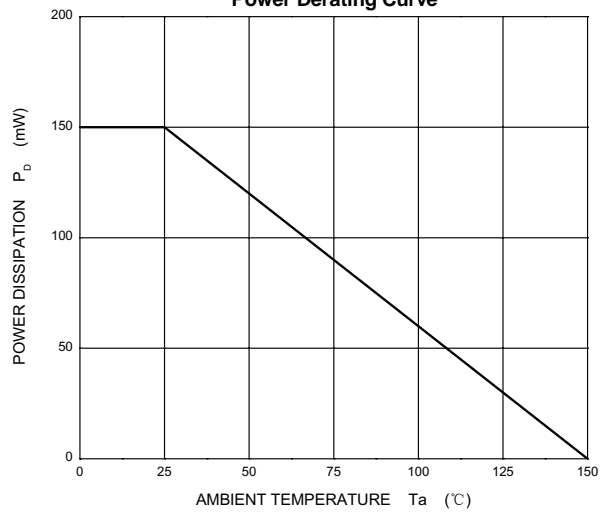


1SS184

MOUNTING PAD LAYOUT

SOT-23

Unit:Inch(mm)

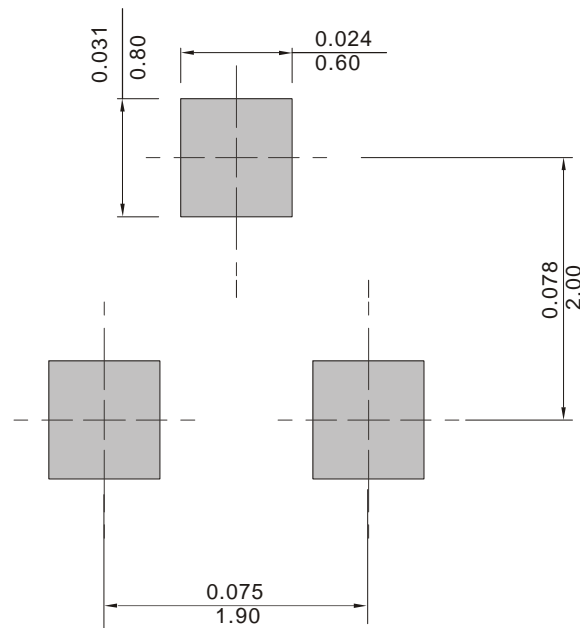

ORDER INFORMATION

- Packing information

Part Number	Case	Reel Size	QUANTITY
1SS184	SOT-23	7 Inch	3000