

BAS316

SWITCHING DIODE

VOLTAGE	100 Volt	POWER	250 mW
---------	----------	-------	--------



SOD-323 Unit:mm

FEATURES

- Fast Switching Speed
- Low Reverse Current
- Lead free in compliance with EU RoHS
- Marking code: A6.

MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

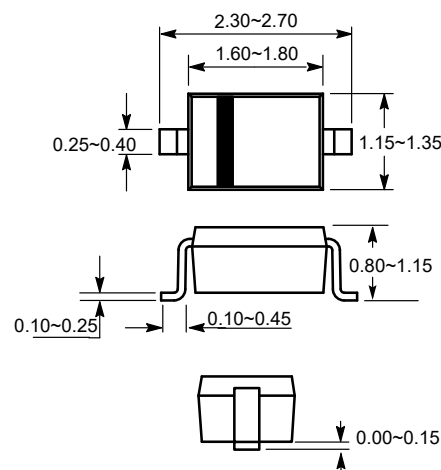

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS($T_A = 25^{\circ}\text{C}$ unless otherwise noted)





Parameter	Symbol	Value	Units
Peak reverse voltage	V_{RM}	85	V
Reverse voltage	V_R	75	V
Average Rectified Output Current	I_O	250	mA
Non-repetitive Peak Forward surge current @ $t=8.3\text{ms}$	I_{FSM}	2.0	A
Power dissipation	P_D	250	mW
Thermal resistance junction to ambient	$R_{\theta JA}$	500	$^{\circ}\text{C/W}$
Junction Temperature	T_J	150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 to +150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS($T_A = 25^{\circ}\text{C}$ unless otherwise noted)

Characteristic	Symbol	Conditions	Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	($I_R = 100 \mu\text{A}$)	100			V
Reverse current	I_R	($V_R = 25 \text{ V}$) ($V_R = 75 \text{ V}$)			30 1.0	nA μA
Forward Voltage	V_F	($I_F = 1.0 \text{ mA}$) ($I_F = 10 \text{ mA}$) ($I_F = 50 \text{ mA}$) ($I_F = 150 \text{ mA}$)			0.715 0.855 1.00 1.25	V
Total Capacitance	C_T	($V_R = 0 \text{ V}$, $f = 1.0 \text{ MHz}$)			1.5	pF
Reverse Recovery Time	t_{rr}	$I_F=10\text{mA}$, $I_R=10\text{mA}$, $I_{rr}=0.1I_R$, $R_L=100 \Omega$			4.0	ns

BAS316

Typical Characteristics

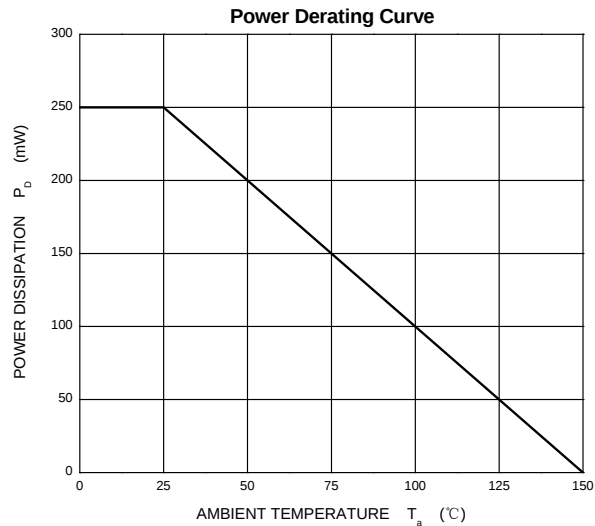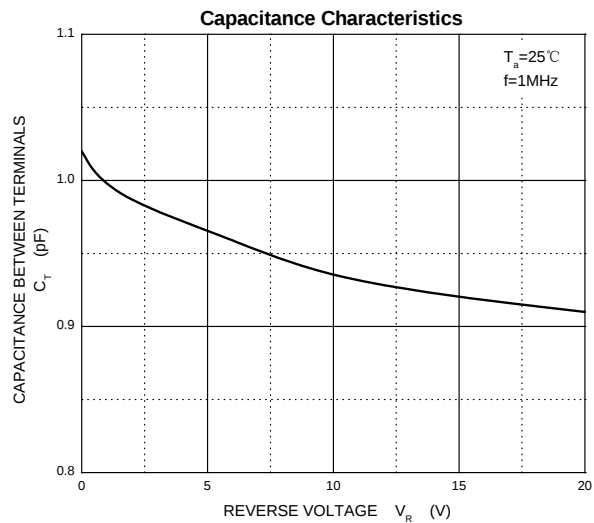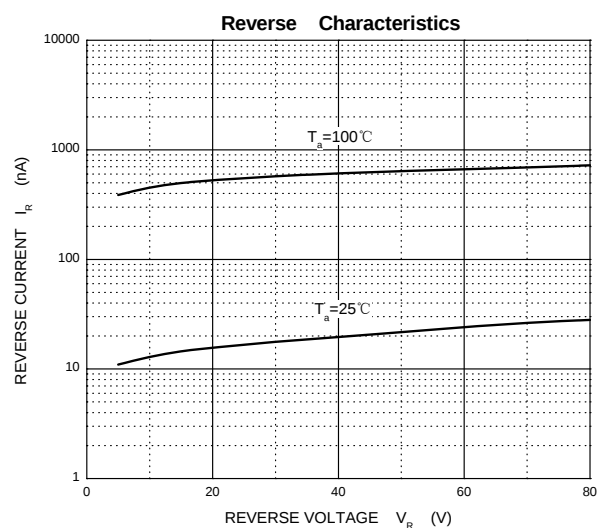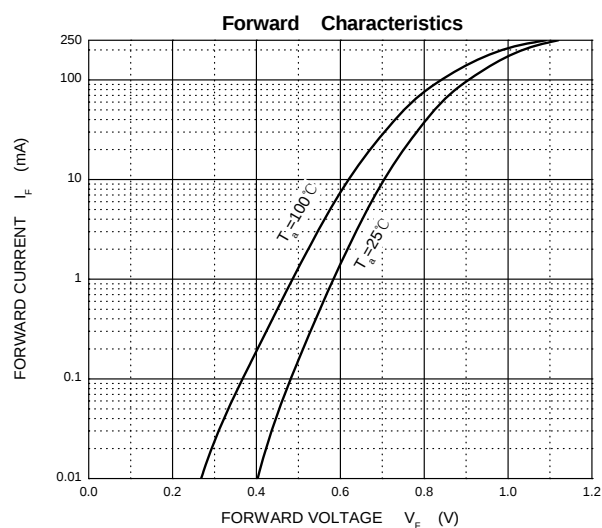


BAS316

MOUNTING PAD LAYOUT

SOD-323

Unit:Inch(mm)

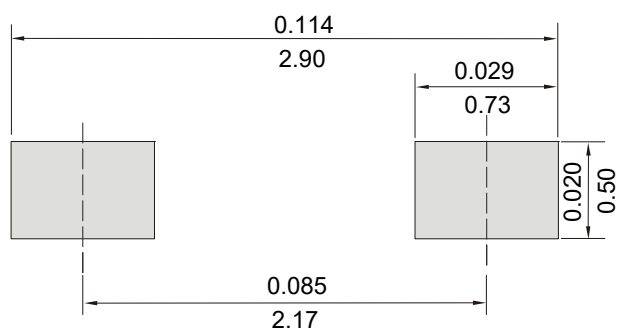

ORDER INFORMATION

- Packing information

Part Number	Case	Reel Size	QUANTITY
BAS316	SOD-323	7 Inch	3000