

BAV199WT

SWITCHING DIODE

VOLTAGE	85 Volt	POWER	200 mW
---------	---------	-------	--------



SOT-323 Unit:mm

FEATURES

- Fast Switching Speed
- Low Reverse Current
- Lead free in compliance with EU RoHS
- Marking code: K52

MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

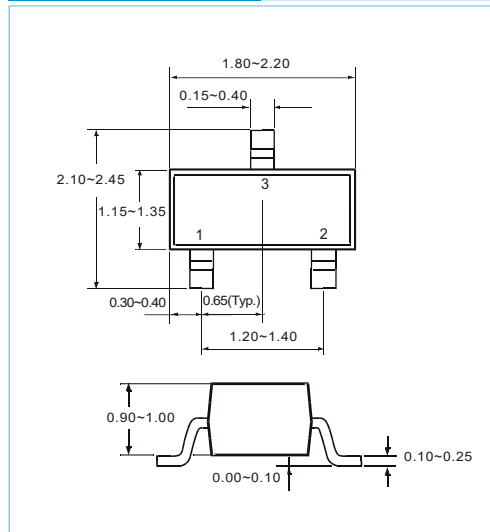

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS($T_A = 25^\circ\text{C}$ unless otherwise noted)





Parameter	Symbol	Value	Units
Peak Repetitive Reverse Voltage	V_{RM}	85	V
Working Peak Reverse Voltage	V_{RWM}	85	V
Average Rectified Output Current	I_O	160	mA
Non-repetitive Peak Forward surge current	I_{FSM}	@t=1us 4.0	A
		@t=1ms 1.0	
		@t=1s 0.5	
Power dissipation	P_D	200	mW
Thermal resistance junction to ambient	$R_{\theta JA}$	625	$^\circ\text{C/W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 to +150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Conditions	Min	Typ	Max	Unit
Reverse voltage	$V_{(BR)}$	($I_R = 100 \mu\text{A}$)	85			V
Reverse current	I_R	($V_R = 70\text{V}$)			5	nA
Forward Voltage	V_F	($I_F = 1.0 \text{ mA}$) ($I_F = 10 \text{ mA}$) ($I_F = 50 \text{ mA}$) ($I_F = 150 \text{ mA}$)			0.9 1.0 1.10 1.25	V
Total Capacitance	C_T	($V_R = 0 \text{ V}$, $f = 1.0 \text{ MHz}$)		2.0		pF
Reverse Recovery Time	t_{rr}	$I_F=10\text{mA}$, $I_R=10\text{mA}$, $I_{rr}=0.1I_R$, $R_L=100 \Omega$			3.0	us

BAV199WT

Typical Characteristics

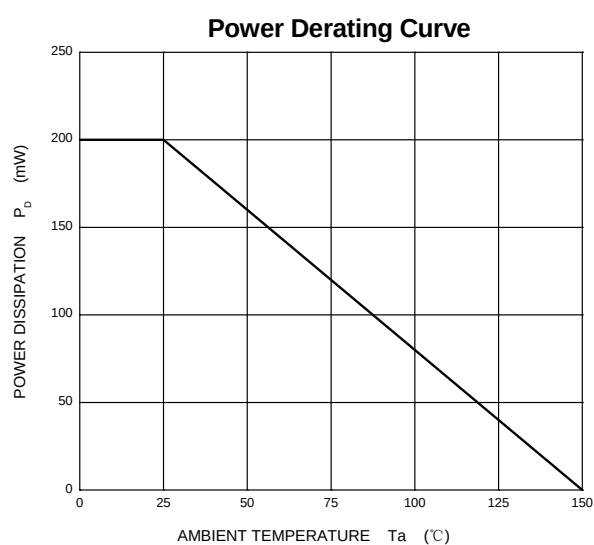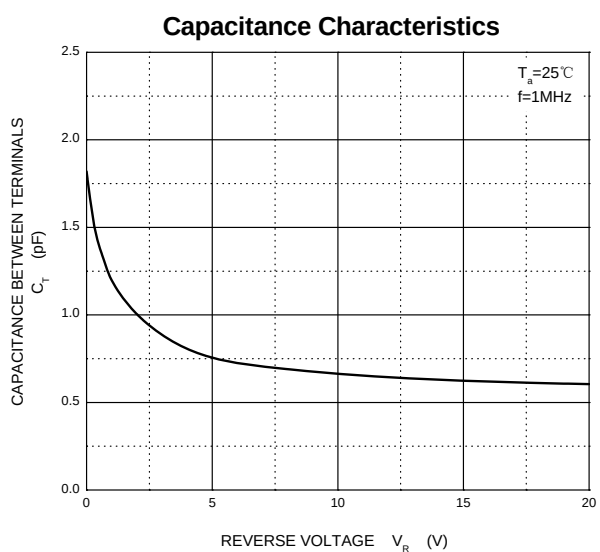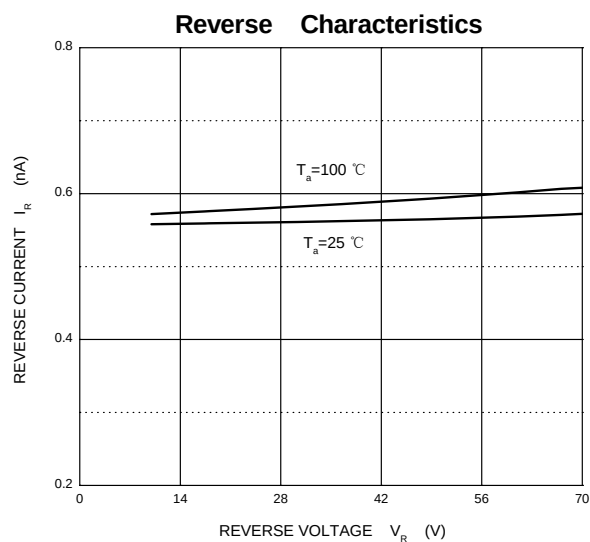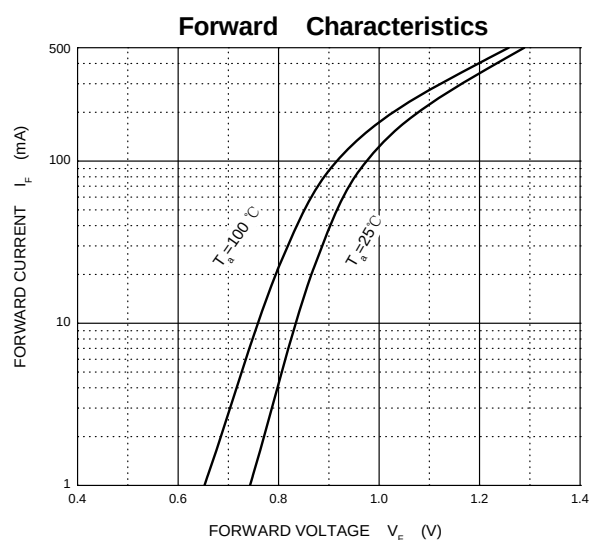


BAV199WT

MOUNTING PAD LAYOUT

SOT-323

Unit:Inch(mm)

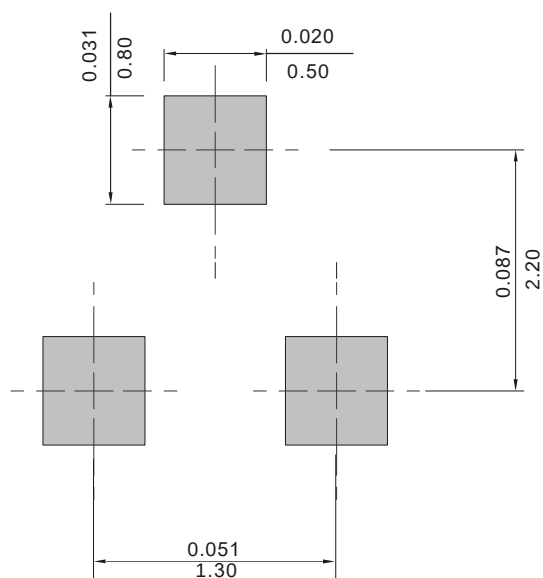

ORDER INFORMATION

- Packing information

Part Number	Case	Reel Size	QUANTITY
BAV199WT	SOT-323	7 Inch	3000