

PR201G~PR207G

FAST RECOVERY PLASTIC RECTIFIER

VOLTAGE 50 to 1000 Volt **CURRENT** 2.0 Ampere

DO-15


Unit:mm

FEATURES

- Glass Passivated Junction
- Low Leakage Current
- High current capability
- High reliability
- Lead free in compliance with EU RoHS

MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

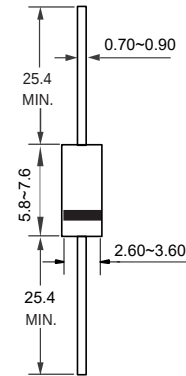

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

PARAMETER	SYMBOL	PR201G	PR202G	PR203G	PR204G	PR205G	PR206G	PR207G	UNITS		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V		
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	7000	V		
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V		
Maximum Average Forward Current (see FIG.1)	$I_{F(AV)}$	2.0							A		
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	60							A		
Maximum Forward Voltage at 2.0 A	V_F	1.30							V		
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	5.0 100							μA		
Maximum Reverse Recovery Time(Note 1)	t_{rr}	150				250	500		ns		
Thermal Resistance	$R_{\theta JA}$	50							$^{\circ}C / W$		
Typical Junction Capacitance (Note2)	C_J	30							pF		
Operating Junction Temperature Range	T_J	-55 to +150							$^{\circ}C$		
Storage Temperature Range	T_{STG}	-55 to +150							$^{\circ}C$		

NOTES:

1. Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $t_{rr}=0.25A$
2. Measured at 1.0MHz and applied reverse voltage of 4.0 volt

PR201G~PR207G

RATING AND CHARACTERISTIC CURVES

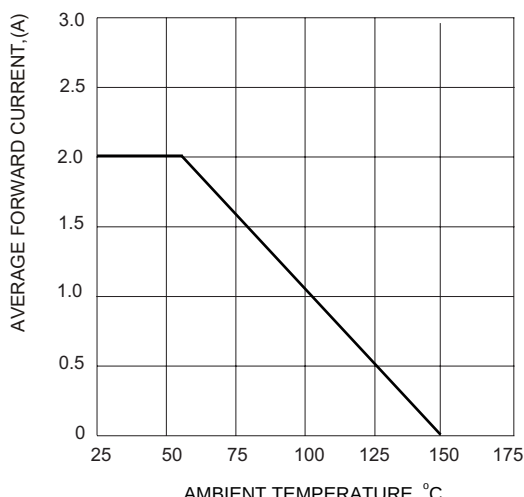


Fig. 1 Forward Current Derating Curve

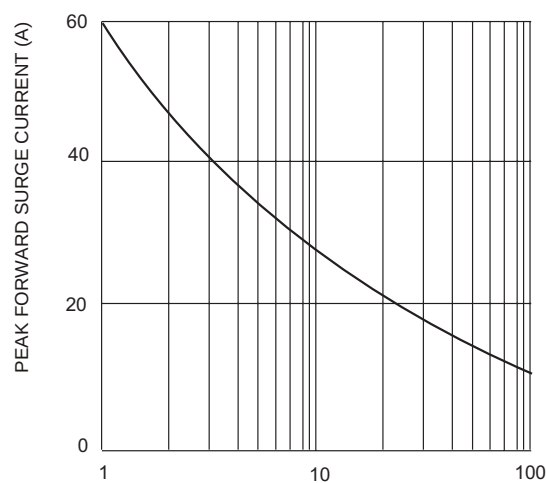


Fig. 2 Surge Current Derating Curve

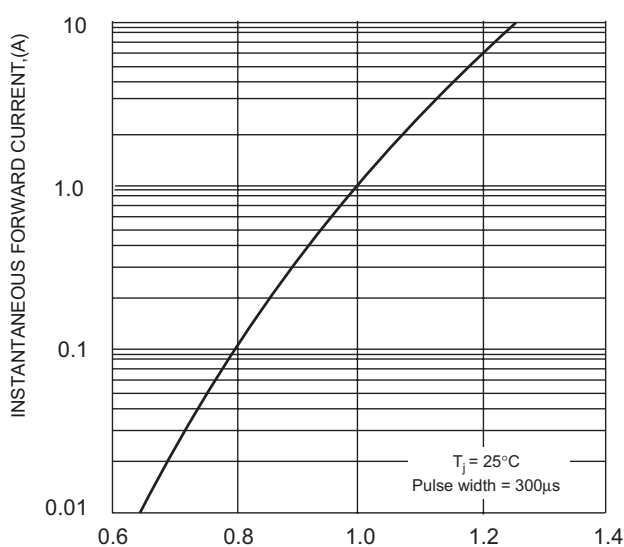


Fig. 3 Typical Forward Characteristics


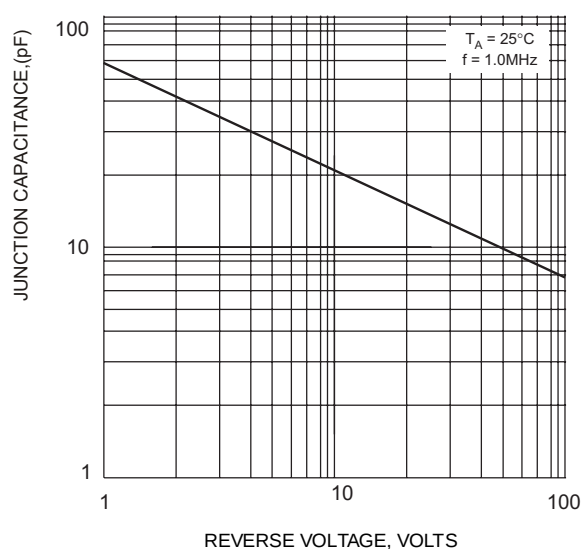


Fig. 4 Typical Junction Capacitance

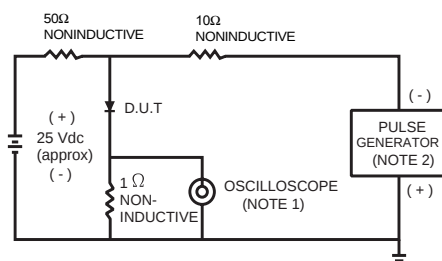

NOTES:
 3. Rise time = 7.0 ns max; Input impedance = 1.0 megaohm 22 pf.
 4. Rise time = 10 ns max; Source impedance = 50 ohms.

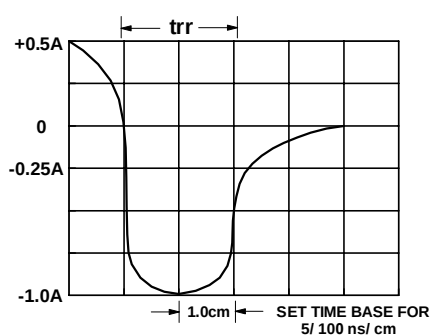


Fig. 5 Reverse Recovery Time Characteristic and Test Circuit

PR201G~PR207G

ORDER INFORMATION

- Packing information

Part Number	Case	Reel Size	QUANTITY
PR201G~PR207G	DO-15	13 Inch	4000