

SB220~SB260

SCHOTTKY BARRIER RECTIFIERS

VOLTAGE 20 to 60 Volt **CURRENT** 2 Amper


DO-15 Unit:mm

FEATURES

- Guard Ring Protection
- High Surge Current Capability
- Lead free in compliance with EU RoHS

MECHANICAL DATA

- Case Material: Molded Plastic.
- UL Flammability Classification Rating 94V-0

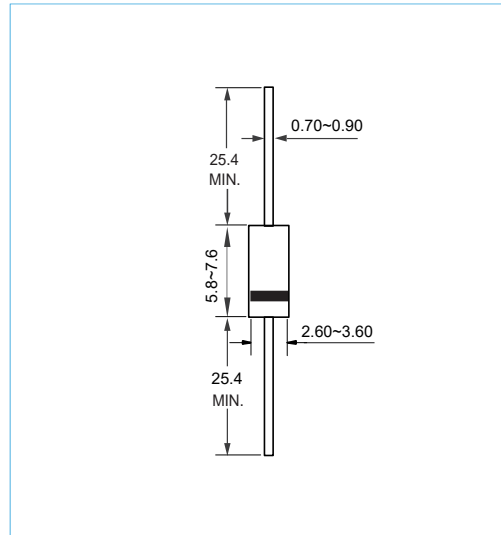

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load.

PARAMETER	SYMBOL	SB220	SB230	SB240	SB245	SB250	SB260	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	45	50	60	V
Maximum RMS Voltage	V_{RMS}	14	21	28	31.5	35	42	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	45	50	60	V
Maximum Average Forward Current (See Figure 1)	$I_{F(AV)}$	2						A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	50						A
Maximum Forward Voltage at 2.0 A	V_F	0.50				0.70		V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	0.5						mA
Thermal Resistance (Note2)	$R_{\theta JA}$	50						°C / W
Typical Junction Capacitance (Note1)	C_J	170				140		pF
Operating Junction Temperature Range	T_J	-55 to +150						°C
Storage Temperature Range	T_{STG}	-55 to +150						°C

NOTES:

1. Measured at 1.0MHz and applied reverse voltage of 4.0 volt
2. Leads maintained at ambient temperature at a distance of 9.5mm from the case.

SB220~SB260

RATING AND CHARACTERISTIC CURVES

FIG.1 - FORWARD CURRENT DERATING CURVE

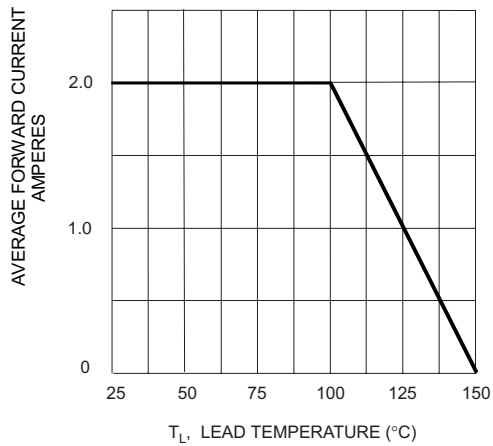


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

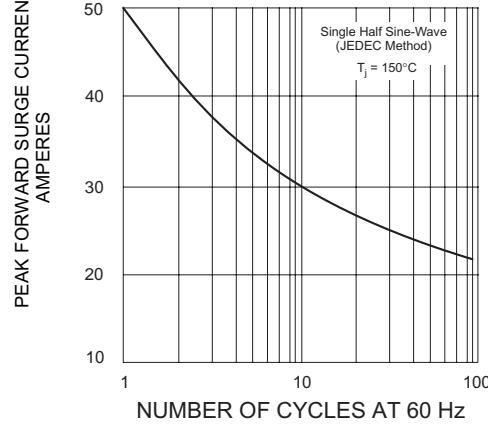


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

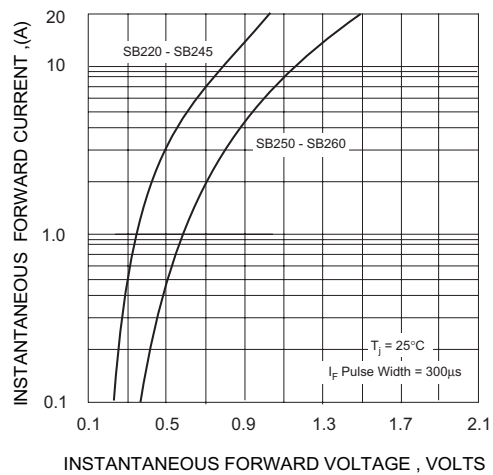


FIG.4 - TYPICAL REVERSE CHARACTERISTICS


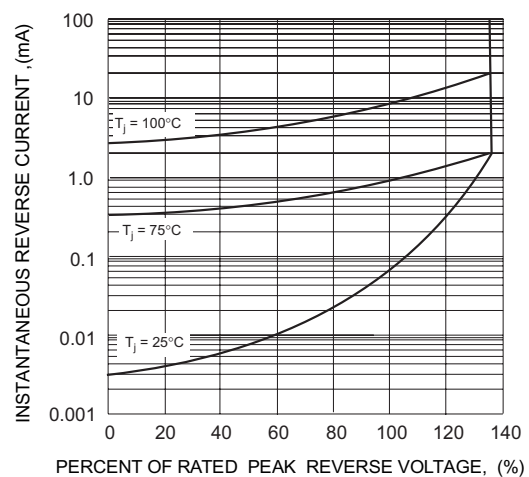


Fig. 5 Typical Junction Capacitance

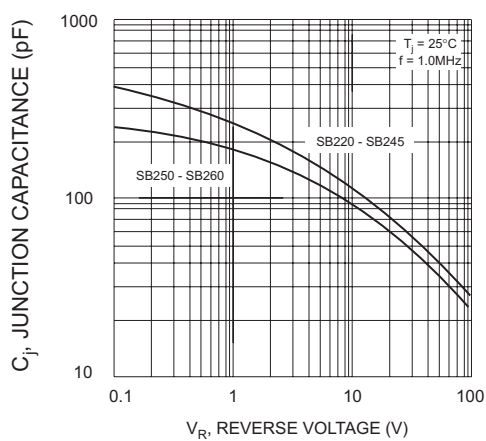

SB220~SB260

ORDER INFORMATION

- Packing information

Part Number	Case	Reel Size	QUANTITY
SB220~SB260	DO-15	13 Inch	4000